

Article

Explicit Formulas for the Deformation of Chiral Porous Circular Beams in Gradient Thermoelasticity

Simona De Cicco

Department of Structures for Engineering and Architecture, University of Naples Federico II, Via Forno Vecchio, 80131 Naples, Italy; simona.decicco@unina.it; Tel.: +39-081-2538902

Abstract: Chirality and porosity are characteristic properties of nanostructured materials. Their effects on the mechanical behaviour of structural elements, such as shells, plates and beams, cannot be disregarded. In this paper, we study the thermoelastic deformation of a chiral porous circular beam loaded with an axial force and torque. The beam is also under the action of a constant temperature field. The analytical solution is obtained using the results established in a paper recently published by the Author [49] within the context of the strain gradient theory proposed by Papanicolopolous [16]. In the constitutive equations, the chirality is introduced by a material constant parameter and the porosity is described by means of a scalar function. Displacements, microdilatation function, and stress and strain fields are expressed in explicit form and in terms of engineering constants. Explicit formulas of the stiffness of chiral porous circular beams are presented and the effects of right and left chirality are discussed.

Keywords: strain gradient elasticity; nanostructures; chiral solids; materials with voids; circular cylinder



Citation: De Cicco, S. Explicit Formulas for the Deformation of Chiral Porous Circular Beams in Gradient Thermoelasticity. *Symmetry* **2024**, *1*, 0. <https://doi.org/>

Academic Editor:
Firstname Lastname

Received: 2 January 2024
Revised: 16 January 2024
Accepted: 18 January 2024
Published:



Copyright: © 2024 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

In general, the term chiral, is used to describe an object that is non-superposable on its mirror image. In continuum mechanics, a material whose properties are not invariant to inversion is called chiral. Ordinary materials, as structural and building materials, do not exhibit chirality and this property has been ignored in mechanics for a long time. In recent years, the great scientific and technical achievements in the creation of nanomaterials and nanotechnology have driven interest in the research of novel phenomena and properties of materials whose internal structure has nanoscale dimensions. Chirality is a characteristic property of nanomaterials and its effects on the behaviour of structural elements (shells, plates, beams, etc.) are not negligible. For a brief historical sketch on nanomaterials and nanotechnology, see Guz and Rushchitskii [1] and the references therein. For an overview of chirality in mechanics, see Lakes [2].

Various mathematical theories have been considered to introduce chirality in the mechanical behaviour of materials [3–6]. Among the microcontinuum theories of elasticity, the Cosserat theory has attracted increasing interest for describing microstructural effects due to chirality of the microstructure [7–9]. An extended micropolar theory was ideated to study the chiral effects that arise from coupling between stretching deformations and the microrotation [10–13]. In Cosserat models, chirality introduces three additional parameters for a total of nine material parameters. An alternative approach is provided by the strain gradient theory, which has been shown to be effective in investigating problems related to size effects and nanotechnology [14,15]. In [16], Papanicolopolous adapted the Mindlin–Eshel strain gradient theory for centrosymmetric materials [17] for the case of noncentrosymmetric solids. In contrast with the Cosserat model, in the strain gradient theory the chiral behaviour is controlled by a single material parameter and the sign of parameter allows for distinguishing between right and left chirality.

Porosity is another important feature of materials with nanostructures. Nanotubes, nanospheres, and other nanoparticles possess a high porosity because of their internal cavities [18,19].

There are a number of theories that describe the mechanical properties of materials with single and multiple porosity (see, e.g., [20–22] and the references therein). Microcontinuum field theories provide suitable mathematical models to investigate the behaviour of porous media [23,24]. For instance, if in the microstretch theory the rigid microrotation of the material particles is absent, we obtain the theory of materials with voids proposed by Cowin and Nunziato [25]. In both theories, the variation in void volume is described by an independent kinematical variable named the microdilatation function. The Cowin–Nunziato theory has been subject to intensive study and a great number of contributions regarding the fundamentals and applications have been published [26–33].

This paper is concerned with the strain gradient theory of porous thermoelastic materials. The theory is constructed adding the second-order partial derivative of the displacement and the first order derivative of the microdilatation function in the classical set of independent constitutive variables [34,35]. We applied this theory to study the thermoelastic deformation of a chiral porous circular cylinder.

The problems of the elastic deformation of generalized models of beams have been largely investigated [36–41]. For recent theoretical results on the theory of nanobeams, see [42–45]. The method of solution is well known and consists of reducing the 3D problem in the solution of two-dimensional problems. Usually, the solution depends on the cross section and cannot be expressed in explicit form, so we have only a qualitative description of the deformation. In the case of chiral beams, in contrast with the classical elasticity, an axial force produces torsion and torque produces extension. These effects are not typical of chirality and have been observed in some nonlinear phenomena, termed the poynting effect [46–48]. Possible correlations between the poynting effect and chirality have not yet been investigated.

In a recent article, De Cicco and Iesan [49] solved the general problem of the thermoelastic deformation of chiral porous cylinders. In this paper, we used the results established in [49] to obtain explicit formulas for the case of a cylinder with a circular cross-section and loaded with an axial force, torque, and constant temperature field. As the general solution presented in [49] was quite complex and could be difficult to use, the purpose of this study was to express the relations for the displacement, microdilatation function, and stress and strain fields in a convenient form, avoiding the use exceedingly complicated and tedious calculations used by researchers in the field. We obtained a clear qualitative and quantitative description of the deformation, which made it possible to distinguish the effects of right and left chirality. Using suitable notations, we introduced engineering constants and expressed the solution in terms of the Young-type modulus and Poisson-type ratio. The results were of practical use and would be useful for testing mechanical properties, such as the stiffness and strength of materials with nanostructures.

The paper is structured as follows. First, we present the basic equations of chiral porous elastic solids and formulate the problem of thermoelastic deformation of the right circular cylinder. Then, we establish the solution with the help of two-dimensional problems. The solutions of special cases, such as chiral (non porous) cylinder and porous (non chiral) cylinder, are derived. Using appropriate notations the displacements, microdilatation function, and stress and strain fields are expressed in terms of engineering constants. The results and the effects of right and left chirality are discussed.

2. Preliminaries

In this section, we formulate the equilibrium problem of a porous chiral cylinder subjected to mechanical forces and a variation in temperature. The cylinder is supposed to be homogeneous and isotropic. We denote the lateral boundary by Π , the terminal cross-sections by Σ_α ($\alpha = 1, 2$), a generic cross-section by Σ , the boundary of Σ_α by Γ_α , the boundary of Σ by Γ , and the length of the cylinders by h . We chose a system of rectangular

axes, such that x_3 – axis is parallel to the generator of the cylinder and the x_1Ox_2 – plane contains the basis Σ_1 at $x_3 = 0$. Let $\mathbf{F} = (F_1, F_2, F_3)$ and $\mathbf{M} = (M_1, M_2, M_3)$ be the prescribed vector representing the resultant force and the resultant moment about O of the tractions acting on Σ_1 . On Σ_2 , there are tractions applied so as to satisfy the equilibrium conditions of the cylinder. We assume a thermal field \mathbf{T} that is independent of the axial coordinate x_3 . The cylinder is supposed to be free of lateral loading. Let u_i be the components of the displacement vector and φ is the microdilatation function. The equilibrium problem of the cylinder consists of finding the functions u_i and φ , satisfying the following systems of equations:

(i) **geometric equations**

$$e_{ij} = \frac{1}{2}(u_{i,j} + u_{j,i}), \quad \kappa_{ijk} = u_{k,ij} \tag{1}$$

where e_{ij} is the strain tensor and κ_{ijk} is the strain gradient tensor.

(ii) **constitutive equations**

$$\begin{aligned} \tau_{ij} &= \lambda e_{rr} \delta_{ij} + 2\mu e_{ij} + d\varphi \delta_{ij} + f(\varepsilon_{ikm} \kappa_{jkm} + \varepsilon_{jkm} \kappa_{ikm}) - bT \delta_{ij}, \\ \mu_{ijk} &= \frac{1}{2} \alpha_1 (\kappa_{rri} \delta_{jk} + 2\kappa_{krr} \delta_{ij} + \kappa_{rrj} \delta_{ik}) + \alpha_2 (\kappa_{irr} \delta_{jk} + \kappa_{jrr} \delta_{ik}) \\ &\quad + 2\alpha_3 \kappa_{rrk} \delta_{ij} + \beta_1 \delta_{ij} \varphi_{,k} + \beta_2 (\delta_{ik} \varphi_{,j} + \delta_{jk} \varphi_{,i}) \\ &\quad + 2\alpha_4 \kappa_{ijk} + \alpha_5 (\kappa_{kji} + \kappa_{kij}) + f(\varepsilon_{iks} e_{js} + \varepsilon_{jks} e_{is}), \\ \sigma_i &= \beta_1 \kappa_{rri} + 2\beta_2 \kappa_{irr} + a_0 \varphi_{,i}, \quad g = de_{rr} + \zeta \varphi - \beta T, \end{aligned} \tag{2}$$

where τ_{ij} is the stress tensor; μ_{ijk} is the dipolar stress tensor; σ_i is the equilibrated stress vector; g is the intrinsic body force; T is the temperature; δ_{ij} is the Kronecker delta; ε_{ijk} is the alternating symbol; λ, μ and b are the constitutive constants of the classical theory of elasticity; $\alpha_i (i = 1, 2, \dots, 5)$ and $\beta_j (j = 1, 2)$ are the constitutive constants associated with the gradient terms; d, a_0, ζ , and β are constitutive constants linked to porosity; and f is a constant associated with the chiral behaviour.

(iii) **equilibrium equations**

$$\tau_{ji,j} - \mu_{kji,kj} = 0, \quad \sigma_{j,j} - g = 0. \tag{3}$$

The following boundary conditions

$$P_i = 0, \quad R_i = 0, \quad Q_i = 0, \quad \sigma_\alpha n_\alpha = 0 \tag{4}$$

must be satisfied on the lateral surface Π . Here, $(n_1, n_2, 0)$ are the direction cosines of the exterior normal to Π and

$$\begin{aligned} P_i &= \tau_{3i} + 2\mu_{\alpha 3i, \alpha} + \mu_{33i, 3}, \quad R_i = \mu_{33i} \text{ on } \Sigma_1, \\ Q_i &= -2\mu_{\alpha 3i} n_\alpha, \text{ on } \Gamma_1. \end{aligned} \tag{5}$$

Further,

$$\int_{\Sigma_1} P_\alpha da + \int_{\Gamma_1} Q_\alpha ds = F_\alpha, \tag{6}$$

$$\int_{\Sigma_1} P_3 da + \int_{\Gamma_1} Q_3 ds = F_3, \tag{7}$$

$$\int_{\Sigma_1} (x_\alpha P_3 + R_\alpha) da + \int_{\Gamma_1} x_\alpha Q_3 ds = \varepsilon_{\beta\alpha 3} M_\beta, \tag{8}$$

$$\int_{\Sigma_1} \varepsilon_{\alpha\beta 3} x_\alpha P_\beta da + \int_{\Gamma_1} \varepsilon_{\alpha\beta 3} x_\alpha Q_\beta ds = M_3 \tag{9}$$

have to be satisfied on the end Σ_1 .

3. Circular Cylinder

We consider a porous chiral circular cylinder of radius a subjected to the following external data

$$\mathbf{F} = (0, 0, F_3), \quad \mathbf{M} = (0, 0, M_3), \quad T = T^* \tag{10}$$

where $F_3, M_3,$ and T^* are the prescribed constants. The solutions of the problem under discussion have the form

$$\begin{aligned} u_\alpha &= \varepsilon_{3\beta\alpha} a_2 x_\beta x_3 + a_1 u_\alpha^{(1)} + a_2 u_\alpha^{(2)} + w_\alpha, \\ u_3 &= a_1 x_3 + a_1 u_3^{(1)} + a_2 u_3^{(2)} + w_3, \\ \varphi &= a_1 \varphi^{(1)} + a_2 \varphi^{(2)} + \psi, \end{aligned} \tag{11}$$

where $u_i^{(\rho)}, \varphi^{(\rho)}, w_1,$ and ψ are unknown functions, which are independent of $x_3,$ and a_1 and a_2 are unknown constants. The functions $u_i^{(\rho)}$ and $\varphi^{(\rho)}$ are the solution of two isothermal plane strain problems, denoted by $A^{(\rho)},$ and the functions w_i and ψ are the solution of a nonisothermal plane strain problem denoted by $A^{(0)}.$ For brevity, the solutions of the problems $A^{(0)}$ and $A^{(\rho)}$ are provided directly omitting the calculations. We obtain

$$u_1^{(1)} = c_1 x_1, \quad u_2^{(1)} = c_1 x_2, \quad u_3^{(1)} = 0, \quad \varphi^{(1)} = c_2, \tag{12}$$

$$u_1^{(2)} = h_1 x_1, \quad u_2^{(2)} = h_1 x_2, \quad u_3^{(2)} = 0, \quad \varphi^{(2)} = h_2, \tag{13}$$

$$w_1 = s_1 x_1, \quad w_2 = s_1 x_2, \quad w_3 = 0, \quad \psi = s_2, \tag{14}$$

where

$$\begin{aligned} c_1 &= \frac{\lambda \xi - d^2}{D}, \quad c_2 = \frac{2\mu d}{D}, \quad h_1 = -2f\xi/D, \quad h_2 = 4df/D \\ s_1 &= \frac{\beta d - b\xi}{D} T^*, \quad s_2 = \frac{2[db - \beta(\lambda + \mu)]}{D} T^* \\ D &= 2[d^2 - \xi(\lambda + \mu)]. \end{aligned} \tag{15}$$

The strain and stress tensors associated with $(u_i^{(1)}, \varphi^{(1)})$ are provided by

$$\begin{aligned} e_{11}^{(1)} &= e_{22}^{(1)} = c_1, \quad e_{12}^{(1)} = e_{13}^{(1)} = e_{23}^{(1)} = e_{33}^{(1)} = 0, \quad \kappa_{ijk}^{(1)} = 0, \\ \tau_{11}^{(1)} &= \tau_{22}^{(1)} = 2(\mu + \lambda)c_1 + dc_2, \quad \tau_{12}^{(1)} = \tau_{13}^{(1)} = \tau_{23}^{(1)} = 0, \\ \mu_{\alpha\beta\gamma}^{(1)} &= \mu_{\alpha\beta 3}^{(1)} = 0, \quad \sigma_\alpha^{(1)} = 0, \quad g^{(1)} = 2c_1 d + c_2 \end{aligned} \tag{16}$$

From relations (13) we obtain

$$\begin{aligned} e_{11}^{(2)} &= e_{22}^{(2)} = h, \quad e_{12}^{(2)} = e_{13}^{(2)} = e_{23}^{(2)} = e_{33}^{(2)} = 0, \quad \kappa_{ijk}^{(2)} = 0, \\ \tau_{11}^{(2)} &= \tau_{22}^{(2)} = 2(\mu + \lambda)h_1 + dh_2, \quad \tau_{12}^{(2)} = \tau_{13}^{(2)} = \tau_{23}^{(2)} = 0, \\ \mu_{\alpha\beta\gamma}^{(2)} &= \mu_{\alpha\beta 3}^{(2)} = 0, \quad \sigma_\alpha^{(2)} = 0, \quad g^{(2)} = 2h_1 d + h_2. \end{aligned} \tag{17}$$

The relations (14) provide

$$\begin{aligned} e_{11}^{(0)} &= e_{22}^{(0)} = s_1, \quad e_{12}^{(0)} = e_{13}^{(0)} = e_{23}^{(0)} = e_{33}^{(0)} = 0, \quad \kappa_{ijk}^{(0)} = 0, \\ \tau_{11}^{(0)} &= \tau_{22}^{(0)} = 2(\mu + \lambda)s_1 + ds_2 - bT^*, \quad \tau_{12}^{(0)} = \tau_{13}^{(0)} = \tau_{23}^{(0)} = 0, \\ \mu_{\alpha\beta\gamma}^{(0)} &= \mu_{\alpha\beta 3}^{(0)} = 0, \quad \sigma_\alpha^{(0)} = 0, \quad g^{(0)} = 2s_1 d + s_2 - \beta T^* \end{aligned} \tag{18}$$

We have to determine the constants a_1 and a_2 . In view of external data (10), the boundary conditions (6)–(9) became

$$\int_{\Sigma_1} P_\alpha da + \int_{\Gamma_1} Q_\alpha ds = 0, \tag{19}$$

$$\int_{\Sigma_1} P_3 da + \int_{\Gamma_1} Q_3 ds = F_3, \tag{20}$$

$$\int_{\Sigma_1} (x_\alpha P_3 + R_\alpha) da + \int_{\Gamma_1} x_\alpha Q_3 ds = 0, \tag{21}$$

$$\int_{\Sigma_1} \varepsilon_{\alpha\beta 3} x_\alpha P_\beta da + \int_{\Gamma_1} \varepsilon_{\alpha\beta 3} x_\alpha Q_\beta ds = M_3. \tag{22}$$

The conditions (19) and (21) in view of Equations (5), (16)–(18) are identically satisfied. Conditions (20) and (22) reduce to the following system

$$\begin{aligned} D_{11}a_1 + D_{12}a_2 &= -(F_3 + F_3^*), \\ D_{21}a_1 + D_{22}a_2 &= -M_3 \end{aligned} \tag{23}$$

where

$$\begin{aligned} D_{11} &= 2\pi a^2 \mu \frac{3d^2 - \xi(2\mu + 3\lambda)}{D}, \\ D_{12} = D_{21} &= 4\pi a^2 f \frac{3d^2 - \xi(2\mu + 3\lambda)}{D}, \\ D_{22} &= \mu \frac{\pi a^4}{2} + 4(2\alpha_4 - \alpha_5 + \frac{2\xi f^2}{D})\pi a^2. \\ F_3^* &= -2\mu\pi a^2 s_1. \end{aligned} \tag{24}$$

System (26) uniquely determines the constants a_1 and a_2 . We have

$$\begin{aligned} a_1 &= [-(F_3 + F_3^*)D_{22} - M_3D_{12}]/D^* \\ a_2 &= [(F_3 + F_3^*)D_{12} - M_3D_{11}]/D^* \end{aligned} \tag{25}$$

where

$$D^* = D_{11}D_{22} - D_{12}^2. \tag{26}$$

The solution (11) can be rewritten in the form

$$\begin{aligned} u_1 &= \frac{1}{D^*} \{-F_3[D_{12}x_2x_3 + (c_1D_{22} - h_1D_{12})x_1] + M_3[D_{11}x_2x_3 + (c_1D_{12} - h_1D_{11})x_1] \\ &\quad + \gamma_1 T^*[D_{12}x_2x_3 + (c_1D_{22} - h_1D_{12} + \frac{D^*}{2\mu\pi a^2})x_1]\}, \\ u_2 &= \frac{1}{D^*} \{-F_3[-D_{12}x_1x_3 + (c_1D_{22} - h_1D_{12})x_2] + M_3[-D_{11}x_1x_3 + (c_1D_{12} - h_1D_{11})x_2] \\ &\quad + \gamma_1 T^*[-D_{12}x_1x_3 + (c_1D_{22} - h_1D_{12} + \frac{D^*}{2\mu\pi a^2})x_2]\}, \\ u_3 &= \frac{1}{D^*} (-F_3D_{22} + M_3D_{12} + \gamma_1 T^* D_{22})x_3 \\ \varphi &= \frac{1}{D^*} \{-F_3(c_2D_{22} - h_2D_{12}) + M_3(c_2D_{12} - h_2D_{11}) + T^*[\gamma_1(c_2D_{22} - h_2D_{12}) + \gamma_2 D^*]\} \end{aligned} \tag{27}$$

nonumber

(29)

where

$$\gamma_1 = 2\mu\pi a^2 \frac{\beta d - b\xi}{D}, \quad \gamma_2 = \frac{2[db - \beta(\lambda + \mu)]}{D}. \tag{30}$$

From the general solution (27), we derive the solutions of some special cases.

- **chiral circular cylinder** ($b = 0, \beta = 0$)

It follows from (15) and (28)

$$c_2 = 0, \quad h_2 = 0, \quad \gamma_2 = 0 \tag{31}$$

so that $\varphi = 0$. From (27) and (29), we obtain

$$\begin{aligned} u_1 &= F_3 \left\{ -\frac{2f}{\mu k_1} x_2 x_3 + \left[\frac{\lambda}{2\mu(2\mu + 3\lambda)A} + \frac{2f^2}{\mu^2 k_1} \right] x_1 \right\} + M_3 \left(\frac{1}{k_1} x_2 x_3 - \frac{f}{\mu k_1} x_1 \right) \\ &\quad + T^* b \left\{ \frac{2fA}{(\mu + \lambda)k_1} x_2 x_3 + \left[\frac{1}{2\mu + 3\lambda} - \frac{2f^2 A}{\mu(\mu + \lambda)k_1} \right] x_1 \right\} \\ u_2 &= F_3 \left\{ \frac{2f}{\mu k_1} x_1 x_3 + \left[\frac{\lambda}{2\mu(2\mu + 3\lambda)A} + \frac{2f^2}{\mu^2 k_1} \right] x_2 \right\} - M_3 \left(\frac{1}{k_1} x_1 x_3 + \frac{f}{\mu k_1} x_2 \right) \\ &\quad + T^* b \left\{ -\frac{2fA}{(\mu + \lambda)k_1} x_1 x_3 + \left[\frac{1}{2\mu + 3\lambda} - \frac{2f^2 A}{\mu(\mu + \lambda)k_1} \right] x_2 \right\} \\ u_3 &= \left\{ -F_3 \left[\frac{\mu + \lambda}{\mu(2\mu + 3\lambda)A} + \frac{4f^2}{\mu^2 k_1} \right] + M_3 \frac{2f}{\mu k_1} + T^* b \left[\frac{1}{2\mu + 3\lambda} + \frac{4f^2 A}{\mu(\mu + \lambda)k_1} \right] \right\} x_3 \end{aligned} \tag{32}$$

where $A = \pi a^2, I_0 = \pi a^4 / 2$ and

$$k_1 = \mu I_0 + 4(2\alpha_4 - \alpha_5)A - \frac{12f^2 A}{\mu}. \tag{33}$$

- **porous circular cylinder** ($f = 0$)

When the material is achiral, f is equal to zero. Moreover, we put the constitutive constants associated with the strain gradient equal to zero. These assumptions imply

$$D_{12} = 0, \quad D_{22} = \mu I_0, \quad D^* = D_{11} D_{22} \quad h_1 = h_2 = 0. \tag{34}$$

Introducing Equations (32) into (27), we have the solution of an achiral circular cylinder in the theory of materials with voids.

$$\begin{aligned} u_1 &= -\frac{F_3 c_1}{D_{11}} x_1 + \frac{M_3}{D_{22}} x_2 x_3 + T^* \frac{\gamma_1}{D_{11}} x_1 \\ u_2 &= -\frac{F_3 c_1}{D_{11}} x_2 - \frac{M_3}{D_{22}} x_1 x_3 + T^* \frac{\gamma_1}{D_{11}} x_2 \\ u_3 &= (-F_3 + T^* \gamma_1) \frac{1}{D_{11}} x_3 \\ \varphi &= -\frac{F_3 c_2}{D_{11}} + T^* \left(\frac{\gamma_1 c_2}{D_{11}} + \gamma_2 \right) \end{aligned} \tag{35}$$

where we used the relation

$$\frac{1}{D_{11}} = \frac{c_1}{D_{11}} + \frac{1}{2\mu\pi a^2} \tag{36}$$

4. Engineering Material Constants

In this section, solution (27), (30), and (33) are rewritten in terms of technical constants.

- **porous achiral circular cylinder**

We assume that the internal energy density is a positive definite form. This assumption implies that

$$\mu > 0, \quad \xi > 0, \quad a_0 > 0, \quad 2\mu + 3\lambda > 0, \quad \xi(2\mu + 3\lambda) > 3d^2 \tag{37}$$

We introduce the notations

$$E^* = \frac{\mu(2\mu + 3\lambda^*)}{\mu + \lambda^*}, \quad \nu^* = \frac{\lambda^*}{2(\mu + \lambda^*)}, \quad (38)$$

where

$$\lambda^* = \lambda - d^2/\xi. \quad (39)$$

Of course

$$\lambda^* < \lambda, \quad E^* < E, \quad 2\mu + 3\lambda^* > 0. \quad (40)$$

The elastic constants E^* and ν^* are the counterpart of Young modulus and Poisson ratio in the theory of elastic materials with voids. The inverse relations of (36) are provided by

$$2\mu = \frac{E^*}{1 + \nu^*}, \quad \lambda^* = \frac{\nu^* E^*}{(1 + \nu^*)(1 - 2\nu^*)}, \quad 2\mu + 3\lambda^* = \frac{E^*}{1 - 2\nu^*}. \quad (41)$$

With the help of (36) and (39), we obtain

$$\begin{aligned} c_1 &= -\nu^*, \quad c_2 = -\frac{d}{\xi}(1 - 2\nu^*), \\ \gamma_1 &= b^*(1 - 2\nu^*)A, \quad \gamma_2 = \frac{2b^0(1 + \nu^*)(1 - 2\nu^*)}{\xi E^*}, \\ D_{11} &= AE^*, \quad D_{22} = I_0 \frac{E^*}{2(1 + \nu^*)}, \quad D = -\frac{\xi E^*}{(1 + \nu^*)(1 - 2\nu^*)}, \end{aligned} \quad (42)$$

where

$$b^* = b - \frac{\beta d}{\xi}, \quad b^0 = \beta(\lambda + \mu) - db = \beta(\mu + \lambda^*) - b^*d. \quad (43)$$

Taking into account (40) and (41), relations (33) became

$$\begin{aligned} u_1 &= \frac{1}{E^*} \left[\frac{F_3 \nu^*}{A} x_1 + \frac{2M_3(1 + \nu^*)}{I_0} x_2 x_3 + T^* b^* (1 - 2\nu^*) x_1 \right], \\ u_2 &= \frac{1}{E^*} \left[\frac{F_3 \nu^*}{A} x_2 - \frac{2M_3(1 + \nu^*)}{I_0} x_1 x_3 + T^* b^* (1 - 2\nu^*) x_2 \right], \\ u_3 &= \frac{1}{E^*} \left[-\frac{F_3}{A} + T^* b^* (1 - 2\nu^*) \right] x_3, \\ \varphi &= \frac{1 - 2\nu^*}{E^* \xi} \left[\frac{F_3 d}{A} - \left(3b^* d - \frac{\beta E^*}{1 - 2\nu^*} \right) T^* \right]. \end{aligned} \quad (44)$$

From (1) and (42), the strain tensor is provided by

$$\begin{aligned} e_{11} &= e_{22} = \frac{1}{E^*} \left[\frac{F_3 \nu^*}{A} + T^* b^* (1 - 2\nu^*) \right], \\ e_{12} &= 0, \quad e_{33} = \frac{1}{E^*} \left[-\frac{F_3}{A} + T^* b^* (1 - 2\nu^*) \right], \\ e_{13} &= \frac{M_3(1 + \nu^*)}{E^* I_0} x_2, \quad e_{23} = -\frac{M_3(1 + \nu^*)}{E^* I_0} x_1 \end{aligned} \quad (45)$$

From the constitutive Equations (2) and (43), we obtain

$$\begin{aligned} t_{11} &= t_{22} = t_{12} = 0, \quad t_{33} = -\frac{F_3}{A}, \\ t_{13} &= \frac{M_3}{I_0} x_2, \quad t_{23} = -\frac{M_3}{I_0} x_1 \\ \sigma_1 &= \sigma_2 = \sigma_3 = 0, \quad g = 0 \end{aligned} \quad (46)$$

It should be mentioned that if in the Equation (42), we replace E^* with E , ν^* with ν , b^* with b , and put $\varphi = 0$, we obtain the solution of the analogous problem in the classical theory of elasticity.

- **chiral circular cylinder**

Together with (31) and (45), the relations (30) yield

$$\begin{aligned}
 u_1 &= F_3 \left[-\frac{2}{d_1 k_1} x_2 x_3 + \left(\frac{\nu}{EA} + \frac{2}{d_1^2 k_1} \right) x_1 \right] + M_3 \left(\frac{1}{k_1} x_2 x_3 - \frac{1}{d_1 k_1} x_1 \right) \\
 &\quad + T^* b A \left[\frac{2}{d_2 k_1} x_2 x_3 + \left(\frac{1-2\nu}{EA} - \frac{2}{d_1 d_2 k_1} \right) x_1 \right] \\
 u_2 &= F_3 \left[\frac{2}{d_1 k_1} x_1 x_3 + \left(\frac{\nu}{EA} + \frac{2}{d_1^2 k_1} \right) x_2 \right] - M_3 \left(\frac{1}{k_1} x_1 x_3 + \frac{1}{d_1 k_1} x_2 \right) \\
 &\quad + T^* b A \left[-\frac{2}{d_2 k_1} x_1 x_3 + \left(\frac{1-2\nu}{EA} - \frac{2}{d_1 d_2 k_1} \right) x_2 \right] \\
 u_3 &= \left[-F_3 \left(\frac{1}{EA} + \frac{4}{d_1^2 k_1} \right) + M_3 \frac{2}{d_1 k_1} + T^* b \left(\frac{1-2\nu}{E} + \frac{4A}{d_1 d_2 k_1} \right) \right] x_3,
 \end{aligned} \tag{47}$$

where

$$d_1 = \frac{E}{2(1+\nu)f}, \quad d_2 = \frac{E}{2(1+\nu)(1-2\nu)f}. \tag{48}$$

The strain tensor is provided by

$$\begin{aligned}
 e_{11} &= e_{22} = F_3 \left(\frac{\nu}{EA} + \frac{2}{d_1^2 k_1} \right) - M_3 \frac{2}{d_1 k_1} + T^* b \left(\frac{1-2\nu}{E} - \frac{2A}{d_1 d_2 k_1} \right), \\
 e_{33} &= -F_3 \left(\frac{1}{EA} + \frac{4}{d_1^2 k_1} \right) + M_3 \frac{2}{d_1 k_1} + T^* b \left(\frac{1-2\nu}{E} + \frac{4A}{d_1 d_2 k_1} \right), \quad e_{12} = 0, \\
 e_{13} &= \left(-\frac{F_3}{d_1} + \frac{M_3}{2} - \frac{T^* b A}{d_2} \right) \frac{x_2}{k_1}, \quad e_{23} = \left(\frac{F_3}{d_1} - \frac{M_3}{2} + \frac{T^* b A}{d_2} \right) \frac{x_1}{k_1}
 \end{aligned} \tag{49}$$

The components of the stress tensor are

$$\begin{aligned}
 t_{11} &= t_{22} = \frac{2f}{k_1} \left(\frac{2F_3}{d_1} - M_3 - \frac{2bT^*A}{d_2} \right), \\
 t_{33} &= - \left(\frac{F_3}{A} + 2t_{11} \right) \\
 t_{13} &= \left\{ \frac{E}{2(1+\nu)} M_3 + 2f[-F_3 + T^*bA(1-2\nu)] \right\} \frac{x_2}{k_1} \quad t_{12} = 0, \\
 t_{23} &= \left\{ -\frac{E}{2(1+\nu)} M_3 - 2f[-F_3 + T^*bA(1-2\nu)] \right\} \frac{x_1}{k_1}
 \end{aligned} \tag{50}$$

- **porous chiral circular cylinder**

From (24), (26), and (40), we obtain

$$\begin{aligned}
 \frac{c_1 D_{22} - h_1 D_{12}}{D^*} &= - \left(\frac{\nu^*}{E^* A} + \frac{2}{\hat{d}_1^2 k_1} \right), \quad \frac{c_1 D_{12} - h_1 D_{11}}{D^*} = - \frac{1}{\hat{d}_1 k_1}, \\
 \frac{c_2 D_{12} - h_2 D_{11}}{D^*} &= 0, \quad \frac{c_2 D_{22} - h_2 D_{12}}{D^*} = - \frac{(1-2\nu^*)d}{\xi E^* A}, \\
 \gamma_1 \left(\frac{c_1 D_{22} - h_1 D_{12}}{D^*} + \frac{1}{2\mu A} \right) &= b^* \left(\frac{1-2\nu^*}{E^*} - \frac{2A}{d_1 d_2 k_1} \right) \\
 \gamma_1 \left(\frac{c_2 D_{22} - h_2 D_{12}}{D^*} \right) + \gamma_2 &= - \frac{3(1-2\nu^*)b^*d}{\xi E^*} + \frac{\beta}{\xi}
 \end{aligned} \tag{51}$$

where

$$\hat{d}_1 = \frac{E^*}{2(1 + \nu^*)f}, \quad \hat{d}_2 = \frac{E^*}{2(1 + \nu^*)(1 - 2\nu^*)f}. \tag{52}$$

Substituting (49) into (27), we obtain

$$\begin{aligned} u_1 &= F_3 \left[-\frac{2}{\hat{d}_1 k_1} x_2 x_3 + \left(\frac{\nu^*}{E^* A} + \frac{2}{\hat{d}_1^2 k_1} \right) x_1 \right] + M_3 \left(\frac{1}{k_1} x_2 x_3 - \frac{1}{\hat{d}_1 k_1} x_1 \right) \\ &\quad + T^* b^* A \left[\frac{2}{\hat{d}_2 k_1} x_2 x_3 + \left(\frac{1 - 2\nu^*}{E^* A} - \frac{2}{\hat{d}_1 \hat{d}_2 k_1} \right) x_1 \right] \\ u_2 &= F_3 \left[\frac{2}{\hat{d}_1 k_1} x_1 x_3 + \left(\frac{\nu^*}{E^* A} + \frac{2}{\hat{d}_1^2 k_1} \right) x_2 \right] - M_3 \left(\frac{1}{k_1} x_1 x_3 + \frac{1}{\hat{d}_1 k_1} x_2 \right) \\ &\quad + T^* b^* A \left[-\frac{2}{\hat{d}_2 k_1} x_1 x_3 + \left(\frac{1 - 2\nu^*}{E^* A} - \frac{2}{\hat{d}_1 \hat{d}_2 k_1} \right) x_2 \right] \\ u_3 &= \left[-F_3 \left(\frac{1}{E^* A} + \frac{4}{\hat{d}_1^2 k_1} \right) + \frac{2M_3}{\hat{d}_1 k_1} + T^* b^* A \left(\frac{1 - 2\nu^*}{E^* A} + \frac{4}{\hat{d}_1 \hat{d}_2 k_1} \right) \right] x_3, \\ \varphi &= \frac{1 - 2\nu^*}{E^* \xi} \left[\frac{F_3 d}{A} + T^* \left(-3b^* d + \frac{\beta E^*}{1 - 2\nu^*} \right) \right]. \end{aligned} \tag{53}$$

The strain tensor is easily determined from (51)

$$\begin{aligned} e_{11} &= e_{22} = F_3 \left(\frac{\nu^*}{E^* A} + \frac{2}{\hat{d}_1^2 k_1} \right) - \frac{M_3}{\hat{d}_1 k_1} + T^* b^* A \left(\frac{1 - 2\nu^*}{E^* A} - \frac{2}{\hat{d}_1 \hat{d}_2 k_1} \right), \\ e_{33} &= -F_3 \left(\frac{1}{E^* A} + \frac{4}{\hat{d}_1^2 k_1} \right) + \frac{2M_3}{\hat{d}_1 k_1} + T^* b^* A \left(\frac{1 - 2\nu^*}{E^* A} + \frac{4}{\hat{d}_1 \hat{d}_2 k_1} \right), \quad e_{12} = 0, \\ e_{13} &= \frac{1}{k_1} \left(-\frac{F_3}{\hat{d}_1} + \frac{M_3}{2} + \frac{T^* b^* A}{\hat{d}_2} \right) x_2, \quad e_{23} = -\frac{1}{k_1} \left(-\frac{F_3}{\hat{d}_1} + \frac{M_3}{2} + \frac{T^* b^* A}{\hat{d}_2} \right) x_1. \end{aligned} \tag{54}$$

The stress tensor is provided by

$$\begin{aligned} t_{11} &= t_{22} = \frac{2f}{k_1} \left(\frac{2}{\hat{d}_1} - M_3 - \frac{2}{\hat{d}_2} \right), \\ t_{33} &= -\frac{F_3}{A} - \frac{4f}{k_1} \left(\frac{2F_3}{\hat{d}_1} - M_3 + \frac{T^* b^* A}{\hat{d}_2} \right) \\ t_{13} &= \left\{ \frac{E^*}{2(1 - \nu^*)} M_3 + 2f \left[-\frac{F_3}{\hat{d}_1} + T^* b^* A (1 - 2\nu) \right] \right\} \frac{x_2}{k_1} \\ t_{23} &= \left\{ \frac{E^*}{2(1 - \nu^*)} M_3 - 2f \left[-\frac{F_3}{\hat{d}_1} + T^* b^* A (1 - 2\nu) \right] \right\} \frac{x_1}{k_1} \\ t_{12} &= 0 \quad \sigma_i = 0, \quad g = 0 \end{aligned} \tag{55}$$

5. Extensional and Torsional Rigidities

In [17], Mindlin and Eshel presented three forms for the potential energy-density in the case of centrosymmetric and isotropic materials, and derived the relations connecting the three forms. In the context of non-centrosymmetric strain gradient theory, Papanicolopoulos [16] modified the forms II and III by adding a term that introduced chirality in the material behaviour. In this paper, we considered form I of the strain gradient theory. The energy-density function is provided by

$$\begin{aligned} W &= \frac{1}{2} \lambda e_{ij} e_{ij} + \mu e_{ij} + \alpha_1 \kappa_{ik} \kappa_{kij} + \alpha_2 \kappa_{ijj} \kappa_{ikk} + \alpha_3 \kappa_{ik} \kappa_{jjk} + \alpha_4 \kappa_{ijk} \kappa_{ijk} \\ &\quad + \alpha_5 \kappa_{ijk} \kappa_{kji} + 2f \epsilon_{ijk} \kappa_{ijk} e_{jl}. \end{aligned} \tag{56}$$

Necessary and sufficient conditions for positive definiteness of W are

$$\begin{aligned} \mu > 0, \quad 2\mu + 3\lambda > 0, \quad 2\alpha_4 - \alpha_5 > 0, \quad \alpha_4 + \alpha_5 > 0, \\ \frac{5}{3}(\alpha_1 + \alpha_2 + \alpha_3) + \alpha_4 + \alpha_5 > 0 \quad 2(-2\alpha_1 + \alpha_2 + 4\alpha_3) + 3(2\alpha_4 - \alpha_5) > 0, \\ \frac{5}{6}(-\alpha_1 + 2\alpha_2 - 4\alpha_3)^2 < [2(-2\alpha_1 + \alpha_2 + 4\alpha_3) + 3(2\alpha_4 - \alpha_5)] \left[\frac{5}{3}(\alpha_1 + \alpha_2 + \alpha_3) + \alpha_4 + \alpha_5 \right] \\ 12f^2 < \mu(2\alpha_4 - \alpha_5). \end{aligned} \quad (57)$$

The quantity k_1 in Equation (31) is the torsional rigidity of the cylinder. It consists of three terms; the first term is the usual torsional rigidity in classical elasticity, the second term depends by the strain gradient theory, and the third negative term is due to the chirality of the material. From the last disequality of (55), it immediately follows that $k_1 > 0$. In contrast with the classical theory of elasticity, each mechanical or thermal action produces extension, torsion, and a deformation in the plane of the cross section of the cylinder. As consequence, in the case under discussion, we have three torsional rigidities and three extensional rigidities. Tables 1 and 2 show the rigidities corresponding to the forces F_3 and M_3 , and to the temperature T^* .

Table 1. Rigidities of the chiral circular cylinder.

	Torsional Rigidity	Extensional Rigidity
F_3	$\frac{1}{2}d_1k_1$	$\left(\frac{1}{EA} + \frac{4}{d_1^2k_1}\right)^{-1}$
M_3	k_1	$\frac{1}{2}d_1k_1$
T^*	$\frac{d_2k_1}{2bA}$	$\frac{1}{b}\left(\frac{1-2\nu}{E} + \frac{4A}{d_1d_2k_1}\right)^{-1}$

Table 2. Rigidities of chiral porous circular cylinder.

	Torsional Rigidity	Extensional Rigidity
F_3	$\frac{1}{2}\hat{d}_1k_1$	$\left(\frac{1}{E^*A} + \frac{4}{\hat{d}_1^2k_1}\right)^{-1}$
M_3	k_1	$\frac{1}{2}\hat{d}_1k_1$
T^*	$\frac{\hat{d}_2k_1}{2bA}$	$\frac{1}{b}\left(\frac{1-2\nu^*}{E^*} + \frac{4A}{\hat{d}_1\hat{d}_2k_1}\right)^{-1}$

The axial force F_3 rotates the cross-section by an angle

$$\theta(x_3) = \frac{4(1+\nu)f}{Ek_1}F_3x_3, \quad (58)$$

in the case of a chiral cylinder, and by an angle

$$\theta(x_3) = \frac{4(1+\nu^*)f}{E^*k_1}F_3x_3, \quad (59)$$

in the case of a porous chiral cylinder. The sign of θ depends on the sign of the product F_3f . If $F_3f > 0$, the angle θ is positive (counterclockwise), otherwise if $F_3f < 0$, θ is negative (clockwise), Figure 1a,b.

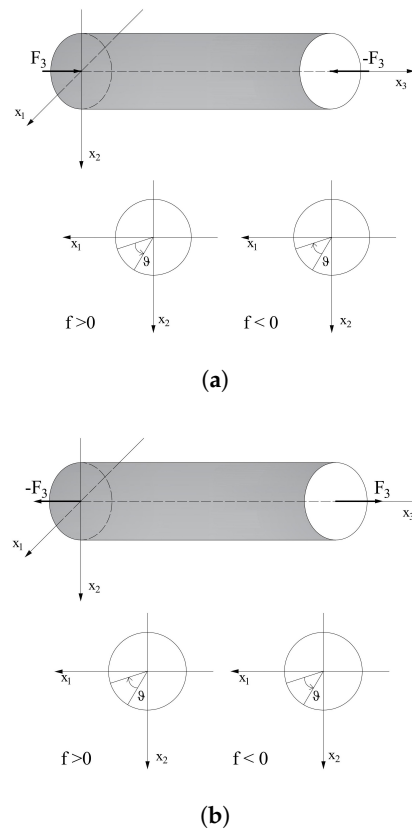


Figure 1. (a) Torsion of a chiral circular beam under compression; (b) Torsion of a chiral circular beam under a traction force.

As a dual effect, the cylinder lengthens or shortens when twisted. If $M_3 f > 0$, the cylinder undergoes an elongation and a contraction of the cross-section. Vice versa, if $M_3 f < 0$, the torsion induces a shortening of the cylinder and a dilatation of the cross section, Figure 2a,b.

The effects of chirality vanish when $f = 0$. In the case of a combined action of the axial force F_3 and the torque M_3 , the angle of torsion θ is provided by

$$\theta(x_3) = \left(\frac{2F_3}{d_1} - M_3 \right) \frac{x_3}{k_1}. \quad (60)$$

Immediately, we see that if M_3 is related to F_3 , by the following relation

$$M_3 = \frac{4(1+\nu)}{E} f F_3 \quad \left(M_3 = \frac{4(1+\nu^*)}{E^*} f F_3 \right), \quad (61)$$

the angle θ is equal to 0 and the torsional effect produced by F_3 vanishes. Moreover, we denote by Δl the variation in length of the axis of the cylinder. If relation (59) holds, from (45), we obtain

$$\Delta l = -\frac{F_3 l}{EA} \quad \left(\Delta l = -\frac{F_3 l}{E^* A} \right), \quad (62)$$

and the extensional effect produced by M_3 disappears.

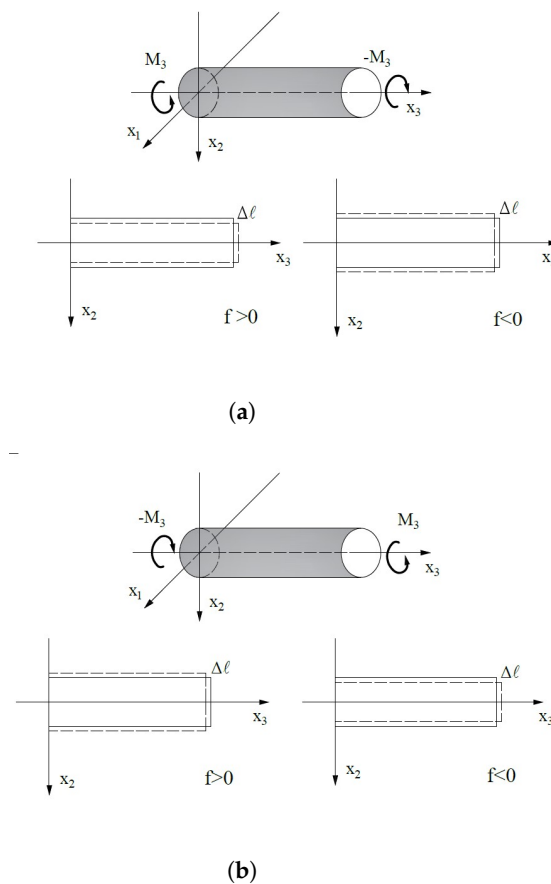


Figure 2. (a) Extension of a chiral circular beam under clockwise torque (on Σ_2); (b) extension of a chiral circular beam under counterclockwise torque (on Σ_2).

6. Conclusions

The results presented in this paper can be summarized as follows:

- We present the basic equations of the strain gradient theory of chiral porous thermoelastic solids and formulate the equilibrium problem of a homogeneous and isotropic circular cylinder subjected to a prescribed axial force and a torque acting on its bases. The cylinder is also under the action of a constant temperature field.
- The analytical solution is determined through the help of two-dimensional problems. The solutions of a chiral (non porous) cylinder and a porous (non chiral) cylinder are derived as special cases.
- With the introduction of suitable notations, we define engineering constants, such as Young-type modulus and Poisson-type ratio, for chiral porous materials. Explicit formulas for the displacements, microdilatation function, stresses, and strain are written in terms of such engineering constants.
- The chirality is introduced in the constitutive equations by a material constant f . The sign of f may be positive or negative. We show that the cylinder is twisted by the axial force F_3 and the rotation will be counterclockwise if $F_3 f > 0$ or clockwise if $F_3 f < 0$. In addition, the torque M_3 produces extension. The cylinder lengthens or shortens depending on $M_3 f > 0$ or $M_3 f < 0$, respectively. Furthermore the cylinder is twisted by the variation in temperature T^* and the sign of the product fT^* discriminates between the two directions of the rotation.
- In contrast with the classical theory of elasticity, the rigidity in the torsion of a chiral beam is measured by three moduli. Similarly, we use three moduli for the extensional rigidity. These moduli are computed and are presented in Table 1 and 2.
- On the basis of the results presented in the paper, a possible next step will be to investigate the elastic deformation of a chiral porous circular beam under the action of

a bending moment and a shear force. Bending and shear stiffness can be derived from the solutions of these problems.

- We show that the bending does not occur in a chiral circular cylinder under uniaxial force, although it is predicted by the solution for cylinders with an arbitrary cross-section. It might be interesting to solve the problem of a cylinder with a non circular section to study the coupling of deformation modes using extension-bending.
- Other important mechanical properties of chiral materials such as the ultimate tensile strength, elongation at rupture, fatigue properties, and so on need to be determined in various research areas, depending on the theoretical and experimental approaches used.

Funding: This research received no external funding.

Data Availability Statement: Data are contained within the article.

Acknowledgments: The author expresses gratitude to the referees for their helpful suggestions.

Conflicts of Interest: The author declares no conflict of interest.

References

1. Guz, A.N.; Rushchitskii, Y. Nanomaterials: On the mechanics of nanomaterials. *Int. Appl. Mech.* **2003**, *39*, 1272–1293.
2. Lakes, R. Elastic and viscoelastic behavior of chiral materials. *Int. J. Mech. Sci.* **2001**, *43*, 1579–1589.
3. Lakes, R.; Benedict, R.L. Noncentrosymmetry in micropolar elasticity. *Int. J. Eng. Sci.* **1982**, *20*, 1161–1167.
4. Natroshvili, D.; Stratis, I.G. Mathematical problems of the theory of elasticity of chiral materials for Lipschitz domains. *Math. Methods Appl. Sci.* **2006**, *29*, 445–478.
5. Toupin, R.A. Theories of elasticity with couple-stress. *Arch. Ration. Mech. Anal.* **1964**, *17*, 85–112.
6. Matsushima, T.; Chambon, R.; Caillerie, D. Large strain finite element analysis of a local second gradient model: Application to localization. *Int. J. Numer. Methods Eng.* **2002**, *54*, 499–521.
7. Nika, G. Cosserat continuum modelling of chiral scale-size effects and their influence on effective constitutive laws. *Forces Mech.* **2022**, *9*, 1–9.
8. Böhmer, C.G.; Lees, Y.; Neff, P. Chirality in the plane. *Mech. Phys. Solids* **2020**, *134*, 1–13.
9. Surówka, P.; Suslov, A.; Jülicher, F.; Baurjce, D. Odd Cosserat elasticity in active materials. *Phys. Rev.* **2023**, *108*, 064609.
10. Giorgio, I.; dell’Isola, F.; Misra, A. Chirality in 2D Cosserat media related to stretch-micro-rotation coupling with links to granular micromechanics. *Int. J. Solids Struct.* **2020**, *202*, 28–38.
11. Giorgio, I.; Hild, F.; Gerami, E.; dell’Isola, F.; Misra, A. Experimental verification of 2D Cosserat chirality with stretch-micro-rotation coupling in orthotropic metamaterials with granular motif. *Mech. Res. Commun.* **2022**, *126*, 104020.
12. Barchiesi, E.; dell’Isola, F.; Bersani, A.M.; Turco, E. Equilibria determination of elastic articulated duoskelian beams in 2D via Riks-type algorithm. *Int. J. Non-linear Mech.* **2021**, *128*, 103628.
13. Misra, A.; Nejadsadeghi, N.; De Angelo, M.; Placidi, L. Chiral metamaterial predicted by granular micromechanics: verified with 1D example synthesized using additive manufacturing. *Cont. Mech. Thermodyn.* **2020**, *32*, 1497–1513.
14. Zhang, Y.Q.; Lin, G.R.; Wang, J.S. Small-scale effects on buckling of multiwalled carbon nanotubes under axial compression. *Phys. Rev. B* **2004**, *70*, 205430.
15. Duan, W.; Wang, Q.; Liew, K.; He, X. Molecular mechanics modelling of carbon nanotube fracture. *Carbon* **2007**, *45*, 1769–1776.
16. Papanicolopoulos, S.A. Chirality in isotropic linear gradient elasticity. *Int. J. Solids Struct.* **2011**, *48*, 745–752.
17. Mindlin, R.D.; Eshel, N.N. On first strain gradient theories in linear elasticity. *Int. J. Solids Struct.* **1968**, *4*, 109–112.
18. Lu, G.Q.; Zhao, X.S. *Nanoporous Materials. Science and Engineering*; Series on Chemical Engineering 4; Imperial College Press: London, UK, 2004.
19. Ernst, S. (Ed.) *Advances in Nanoporous Materials*; Elsevier: Amsterdam, The Netherlands, 2009.
20. Svanadze, M. *Potential Method in Mathematical Theories of Multi-Porosity Media*; Springer: Berlin/Heidelberg, Germany, 2019.
21. Ieşan, D. A theory of thermoelastic materials with voids. *Acta Mech.* **1986**, *60*, 67–89.
22. De Cicco, S. Non-simple elastic materials with double porosity structure. *Arch. Mech.* **2022**, *74*, 127–142.
23. Eringen, A.C. *Microcontinuum Field Theories. Foundations and Solids*; Springer: Berlin/Heidelberg; New York, NY, USA, 1998.
24. Ieşan, D. *Thermoelastic Models of Continua*; Kluwer Academic Publishers: New York, NY, USA, 2004.
25. Cowin, S.C.; Nunziato, J.W. Linear elastic materials with voids. *Elasticity* **1983**, *13*, 125–147.
26. De Cicco, S.; De Angelis, F. A plane strain problem in the theory of elastic materials with voids. *Math. Mech. Solids* **2020**, *25*, 46–59.
27. Svanadze, M.; De Cicco, S. Fundamental solutions in the full coupled linear theory of elasticity for solids with double porosity. *Arch. Mech.* **2013**, *65*, 367–390.
28. De Cicco, S.; Ieşan, D. On the theory of thermoelastic materials with a double porosity structure. *Therm. Stress.* **2021**, *44*, 1514–1533.
29. De Cicco, S. On the deformation of porous spherical bodies under radial surface traction. *J. Theor. Appl. Mech.* **2023**, *61*, 5.
30. Sciarra, G.; Dell’Isola, F. Second gradient poromechanics. *Int. J. Solids Struct.* **2007**, *47*, 6607–6629.

31. Dell’Isola, F.; Gavrilyuk, S. *Variational Models and Methods in Solid and Fluid Mechanics*; CISM Courses and Lectures 535; Springer: Berlin/Heidelberg, Germany, 2012.
32. De Cicco, S. On the deformation of porous spherical shells and other spherical bodies. Current perspectives and new directions in mechanics modelling and design of structural systems. In Proceedings of the 8th International Conference on Structural Engineering, Mechanics and Computation, Cape Town, South Africa, 5–7 September 2022; pp. 309–314.
33. Ellouz, H.; Jrad, H.; Wali, M.; Dammak, F. Large deflection analysis of FGM/magneto-electro-elastic smart shells with porosities under multi-physics loading. *Mech. Adv. Mater. Struct.* **2023**, *30*. <https://doi.org/10.1080/15376494.2023.2243938>.
34. Auffray, N.; Bouchet, R.; Brechet, Y. Derivation of anisotropic matrix for bidimensional strain-gradient elasticity behaviour. *Int. J. Solids Struct.* **2009**, *46*, 440–454.
35. Ieşan, D.; Quintanilla, R. On chiral effects in strain gradient elasticity. *Eur. J. Mech. A Solids* **2016**, *58*, 233–246.
36. Ieşan, D. *Classical and Generalized Models of Elastic Rods*; CRC Press: Boca Raton, FL, USA, 2009.
37. Dell’Isola, F.; Batra, R.C. Saint-Venant’s problem for porous linear elastic materials. *Elasticity* **1997**, *47*, 7–81.
38. Ghiba, I.D. On the deformation of transversely isotropic porous elastic circular cylinder. *Arch. Mech.* **2009**, *5*, 407–421.
39. Birsan, M.; Altenbach, H. Theory of thermoelastic rods made of porous materials. *Arch. Appl. Mech.* **2011**, *81*, 1365–1391.
40. De Cicco, S.; Ieşan, D. Thermal effects in anisotropic porous elastic rods. *Therm. Stress.* **2013**, *81*, 364–377.
41. Malikan, M.; Eremeyev, V.A.; Zur, K.K. Effect of Axial Porosities on Flexomagnetic Response of In-Plane Compressed Piezomagnetic Nanobeams. *Symmetry* **2020**, *12*, 1935.
42. Malikan, M.; Eremeyev, V.A. On the Dynamics of a Visco–Piezo–Flexoelectric Nanobeam. *Symmetry* **2020**, *12*, 643.
43. Arda, M.; Aydogdu, M. Torsional dynamics of coaxial nanotubes with different lengths in viscoelastic medium. *Microsyst. Technol.* **2019**, *25*, 2019, 3943–3957.
44. Akgözn, B.; Civalek, O. Bending analysis of embedded carbon nanotubes resting on an elastic foundation using strain gradient theory. *Acta Astronaut.* **2016**, *119*, 1–12.
45. Akgözn, B.; Civalek, O. A novel microstructure-dependent shear deformable beam model. *Int. J. Mech. Sci.* **2015**, *99*, 10–20.
46. Billington E.W. The poynting effect. *Acta Mech.* **1986**, *58*, 19–31.
47. Dell’Isola, F.; Ruta, G.C.; Batra, R.C. Generalized poynting effects in predeformed prismatic bars. *Elasticity* **1998**, *50*, 181–196.
48. Horgan, C.O.; Murphy, J.G. Poynting and reverse poynting effects in soft materials. *Soft Matter* **2017**, *28*, 4916–4923.
49. De Cicco, S.; Ieşan, D. On the thermal stresses in chiral porous elastic beams. *Contin. Mech. Thermodyn.* **2023**, *35*, 2095–2115. <https://doi.org/10.1007/s00161-023-01236-6>.

Disclaimer/Publisher’s Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.