

XIII International Conference on Durability of Building Materials and Components

02-05 September 2014 São Paulo - Brazil



















Proceedings PRO 96

XIII DBMC

Proceedings of the XIII International Conference on Durability of Building Materials and Components

Edited by M. QUATTRONE and V.M. JOHN

RILEM Publications S.A.R.L.

Edited by M. QUATTRONE and V.M. JOHN

RILEM Proceedings PRO 96 e-ISBN: 978-2-35158-149-0 2014 Edition

The ability to predict the service life – the durability – of a new building material is being ardently sought after in many parts of the world. Widespread efforts are correspondingly being made to increase the durability of materials already in wide use. Any estimate of the economic losses resulting from failures in durability lead inevitably to dollar figures so astronomically large that they are usually regarded with incredulity.

R. F. Legget Proc. of the 1st DBMC Ottawa, 21-23 Aug. 1978.

RILEM Publications S.a.r.l. 157 rue des Blains F-92220 Bagneux - FRANCE

Tel: + 33 1 45 36 10 20 Fax: + 33 1 45 36 63 20

E-mail : dg@rilem.net

XIII DBMC

XIII International Conference on **Durability of Building Materials and** Components

Published by RILEM Publications S.A.R.L.

157 rue des Blains F-92220 Bagneux - France
Tel: + 33 1 45 36 10 20 Fax: + 33 1 45 36 63 20
http://www.rilem.net E-mail: dg@rilem.net
© 2014 RILEM - Tous droits réservés.
e-ISBN: 978-2-35158-149-0

Publisher's note: this book has been produced from electronic files provided by the individual contributors. The publisher makes no representation, express or implied, with regard to the accuracy of the information contained in this book and cannot accept any legal responsibility or liability for any errors or omissions that may be made.

All titles published by RILEM Publications are under copyright protection; said copyrights being the property of their respective holders. All Rights Reserved.

No part of any book may be reproduced or transmitted in any form or by any means, graphic, electronic, or mechanical, including photocopying, recording, taping, or by any information storage or retrieval system, without the permission in writing from the publisher.

RILEM, The International Union of Laboratories and Experts in Construction Materials, Systems and Structures, is a non profit-making, non-governmental technical association whose vocation is to contribute to progress in the construction sciences, techniques and industries, essentially by means of the communication it fosters between research and practice. RILEM's activity therefore aims at developing the knowledge of properties of materials and performance of structures, at defining the means for their assessment in laboratory and service conditions and at unifying measurement and testing methods used with this objective.

RILEM was founded in 1947, and has a membership of over 900 in some 70 countries. It forms an institutional framework for co-operation by experts to:

- optimise and harmonise test methods for measuring properties and performance of building and civil engineering materials and structures under laboratory and service environments,
- prepare technical recommendations for testing methods,
- prepare state-of-the-art reports to identify further research needs,
- collaborate with national or international associations in realising these objectives.

RILEM members include the leading building research and testing laboratories around the world, industrial research, manufacturing and contracting interests, as well as a significant number of individual members from industry and universities. RILEM's focus is on construction materials and their use in building and civil engineering structures, covering all phases of the building process from manufacture to use and recycling of materials.

RILEM meets these objectives through the work of its technical committees. Symposia, workshops and seminars are organised to facilitate the exchange of information and dissemination of knowledge. RILEM's primary output consists of technical recommendations. RILEM also publishes the journal *Materials and Structures* which provides a further avenue for reporting the work of its committees. Many other publications, in the form of reports, monographs, symposia and workshop proceedings are produced.

XIII International Conference on Durability of Building Materials and Components

São Paulo, Brazil

2-5 September 2014

Edited by M. QUATTRONE and V.M. JOHN

RILEM Publications S.A.R.L.

RILEM Publications

The following list is presenting the global offer of RILEM Publications, sorted by series. Each publication is available in printed version and/or in online version.

RILEM PROCEEDINGS (PRO)

PRO 1: Durability of High Performance Concrete (ISBN: 2-912143-03-9); Ed. H. Sommer

PRO 2: Chloride Penetration into Concrete (ISBN: 2-912143-00-04);

Eds. L.-O. Nilsson and J.-P. Ollivier

PRO 3: Evaluation and Strengthening of Existing Masonry Structures (ISBN: 2-912143-02-0); *Eds. L. Binda and C. Modena*

PRO 4: Concrete: From Material to Structure (ISBN: 2-912143-04-7); *Eds. J.-P. Bournazel and Y. Malier*

PRO 5: The Role of Admixtures in High Performance Concrete (ISBN: 2-912143-05-5); *Eds. J. G. Cabrera and R. Rivera-Villarreal*

PRO 6: High Performance Fiber Reinforced Cement Composites - HPFRCC 3 (ISBN: 2-912143-06-3); *Eds. H. W. Reinhardt and A. E. Naaman*

PRO 7: 1st International RILEM Symposium on Self-Compacting Concrete (ISBN: 2-912143-09-8); Eds. Å. Skarendahl and Ö. Petersson

PRO 8: International RILEM Symposium on Timber Engineering (ISBN: 2-912143-10-1); *Ed. L. Boström*

PRO 9: 2nd International RILEM Symposium on Adhesion between Polymers and Concrete ISAP '99 (ISBN: 2-912143-11-X); *Eds. Y. Ohama and M. Puterman*

PRO 10: 3rd International RILEM Symposium on Durability of Building and Construction Sealants (ISBN: 2-912143-13-6); *Eds. A. T. Wolf*

PRO 11: 4th International RILEM Conference on Reflective Cracking in Pavements (ISBN: 2-912143-14-4); Eds. A. O. Abd El Halim, D. A. Taylor and El H. H. Mohamed

PRO 12: International RILEM Workshop on Historic Mortars: Characteristics and Tests (ISBN: 2-912143-15-2); Eds. P. Bartos, C. Groot and J. J. Hughes

PRO 13: 2nd International RILEM Symposium on Hydration and Setting (ISBN: 2-912143-16-0); *Ed. A. Nonat*

PRO 14: Integrated Life-Cycle Design of Materials and Structures - ILCDES 2000 (ISBN: 951-758-408-3); (ISSN: 0356-9403); *Ed. S. Sarja*

PRO 15: Fifth RILEM Symposium on Fibre-Reinforced Concretes (FRC) - BEFIB'2000 (ISBN: 2-912143-18-7); *Eds. P. Rossi and G. Chanvillard*

PRO 16: Life Prediction and Management of Concrete Structures (ISBN: 2-912143-19-5); *Ed. D. Naus*

PRO 17: Shrinkage of Concrete – Shrinkage 2000 (ISBN: 2-912143-20-9); *Eds. V. Baroghel-Bouny and P.-C. Aitcin*

PRO 18: Measurement and Interpretation of the On-Site Corrosion Rate (ISBN: 2-912143-21-7); *Eds. C. Andrade, C. Alonso, J. Fullea, J. Polimon and J. Rodriguez*

XIII DBMC - XIII International Conference on Durability of Building Materials and Components

2-5 September 2014, São Paulo, Brazil

PRO 19: Testing and Modelling the Chloride Ingress into Concrete (ISBN: 2-912143-22-5); *Eds. C. Andrade and J. Kropp*

PRO 20: 1st International RILEM Workshop on Microbial Impacts on Building Materials (CD 02) (e-ISBN 978-2-35158-013-4); *Ed. M. Ribas Silva*

PRO 21: International RILEM Symposium on Connections between Steel and Concrete (ISBN: 2-912143-25-X); *Ed. R. Eligehausen*

PRO 22: International RILEM Symposium on Joints in Timber Structures

(ISBN: 2-912143-28-4); Eds. S. Aicher and H.-W. Reinhardt

PRO 23: International RILEM Conference on Early Age Cracking in Cementitious Systems (ISBN: 2-912143-29-2); *Eds. K. Kovler and A. Bentur*

PRO 24: 2nd International RILEM Workshop on Frost Resistance of Concrete

(ISBN: 2-912143-30-6); Eds. M. J. Setzer, R. Auberg and H.-J. Keck

PRO 25: International RILEM Workshop on Frost Damage in Concrete

(ISBN: 2-912143-31-4); Eds. D. J. Janssen, M. J. Setzer and M. B. Snyder

PRO 26: International RILEM Workshop on On-Site Control and Evaluation of Masonry Structures (ISBN: 2-912143-34-9); *Eds. L. Binda and R. C. de Vekey*

PRO 27: International RILEM Symposium on Building Joint Sealants (CD03); Ed. A. T. Wolf

PRO 28: 6th International RILEM Symposium on Performance Testing and Evaluation of Bituminous Materials - PTEBM'03 (ISBN: 2-912143-35-7; e-ISBN: 978-2-912143-77-8); *Ed. M. N. Partl*

PRO 29: 2nd International RILEM Workshop on Life Prediction and Ageing Management of Concrete Structures (ISBN: 2-912143-36-5); *Ed. D. J. Naus*

PRO 30: 4th International RILEM Workshop on High Performance Fiber Reinforced Cement Composites - HPFRCC 4 (ISBN: 2-912143-37-3); *Eds. A. E. Naaman and H. W. Reinhardt*

PRO 31: International RILEM Workshop on Test and Design Methods for Steel Fibre Reinforced Concrete: Background and Experiences (ISBN: 2-912143-38-1); *Eds. B. Schnütgen and L. Vandewalle*

PRO 32: International Conference on Advances in Concrete and Structures 2 vol. (ISBN (set): 2-912143-41-1); *Eds. Ying-shu Yuan, Surendra P. Shah and Heng-lin Lü*

PRO 33: 3rd International Symposium on Self-Compacting Concrete (ISBN: 2-912143-42-X); *Eds. Ó. Wallevik and I. Nielsson*

PRO 34: International RILEM Conference on Microbial Impact on Building Materials (ISBN: 2-912143-43-8); *Ed. M. Ribas Silva*

PRO 35: International RILEM TC 186-ISA on Internal Sulfate Attack and Delayed Ettringite Formation (ISBN: 2-912143-44-6); *Eds. K. Scrivener and J. Skalny*

PRO 36: International RILEM Symposium on Concrete Science and Engineering – A Tribute to Arnon Bentur (ISBN: 2-912143-46-2); *Eds. K. Kovler, J. Marchand, S. Mindess and J. Weiss*

PRO 37: 5th International RILEM Conference on Cracking in Pavements – Mitigation, Risk Assessment and Prevention (ISBN: 2-912143-47-0); *Eds. C. Petit, I. Al-Qadi and A. Millien*

PRO 38: 3rd International RILEM Workshop on Testing and Modelling the Chloride Ingress into Concrete (ISBN: 2-912143-48-9); *Eds. C. Andrade and J. Kropp*

PRO 39: 6th International RILEM Symposium on Fibre-Reinforced Concretes - BEFIB 2004 (ISBN: 2-912143-51-9); *Eds. M. Di Prisco, R. Felicetti and G. A. Plizzari*

XIII DBMC - XIII International Conference on Durability of Building Materials and Components

2-5 September 2014, São Paulo, Brazil

- **PRO 40:** International RILEM Conference on the Use of Recycled Materials in Buildings and Structures (ISBN: 2-912143-52-7); Eds. E. Vázquez, Ch. F. Hendriks and G. M. T. Janssen
- **PRO 41:** RILEM International Symposium on Environment-Conscious Materials and Systems for Sustainable Development (ISBN: 2-912143-55-1); *Eds. N. Kashino and Y. Ohama*
- **PRO 42:** SCC'2005 China: 1st International Symposium on Design, Performance and Use of Self-Consolidating Concrete (ISBN: 2-912143-61-6); *Eds. Zhiwu Yu, Caijun Shi, Kamal Henri Khayat and Youjun Xie*
- **PRO 43:** International RILEM Workshop on Bonded Concrete Overlays (e-ISBN: 2-912143-83-7); *Eds. J. L. Granju and J. Silfwerbrand*
- **PRO 44:** 2nd International RILEM Workshop on Microbial Impacts on Building Materials (CD11) (e-ISBN: 2-912143-84-5); *Ed. M. Ribas Silva*
- **PRO 45:** 2nd International Symposium on Nanotechnology in Construction, Bilbao (ISBN: 2-912143-87-X); Eds. Peter J. M. Bartos, Yolanda de Miguel and Antonio Porro
- **PRO 46:** ConcreteLife'06 International RILEM-JCI Seminar on Concrete Durability and Service Life Planning: Curing, Crack Control, Performance in Harsh Environments (ISBN: 2-912143-89-6); *Ed. K. Kovler*
- **PRO 47:** International RILEM Workshop on Performance Based Evaluation and Indicators for Concrete Durability (ISBN: 978-2-912143-95-2); *Eds. V. Baroghel-Bouny, C. Andrade, R. Torrent and K. Scrivener*
- PRO 48: 1st International RILEM Symposium on Advances in Concrete through Science and Engineering (e-ISBN: 2-912143-92-6); Eds. J. Weiss, K. Kovler, J. Marchand, and S. Mindess
- **PRO 49:** International RILEM Workshop on High Performance Fiber Reinforced Cementitious Composites in Structural Applications (ISBN: 2-912143-93-4); *Eds. G. Fischer and V.C. Li*
- **PRO 50:** 1st International RILEM Symposium on Textile Reinforced Concrete (ISBN: 2-912143-97-7); *Eds. Josef Hegger, Wolfgang Brameshuber and Norbert Will*
- **PRO 51:** 2nd International Symposium on Advances in Concrete through Science and Engineering (ISBN: 2-35158-003-6; e-ISBN: 2-35158-002-8); *Eds. J. Marchand, B. Bissonnette, R. Gagné, M. Jolin and F. Paradis*
- **PRO 52:** Volume Changes of Hardening Concrete: Testing and Mitigation (ISBN: 2-35158-004-4; e-ISBN: 2-35158-005-2); *Eds. O. M. Jensen, P. Lura and K. Kovler*
- PRO 53: High Performance Fiber Reinforced Cement Composites HPFRCC5
- (ISBN: 978-2-35158-046-2); Eds. H. W. Reinhardt and A. E. Naaman
- **PRO 54:** 5th International RILEM Symposium on Self-Compacting Concrete (ISBN: 978-2-35158-047-9); *Eds. G. De Schutter and V. Boel*
- **PRO 55:** International RILEM Symposium Photocatalysis, Environment and Construction Materials (ISBN: 978-2-35158-056-1); *Eds. P. Baglioni and L. Cassar*
- **PRO56:** International RILEM Workshop on Integral Service Life Modelling of Concrete Structures (ISBN 978-2-35158-058-5); *Eds. R. M. Ferreira, J. Gulikers and C. Andrade*
- **PRO57:** RILEM Workshop on Performance of cement-based materials in aggressive aqueous environments (e-ISBN: 978-2-35158-059-2); *Ed. N. De Belie*
- **PRO58:** International RILEM Symposium on Concrete Modelling CONMOD'08 (ISBN: 978-2-35158-060-8); *Eds. E. Schlangen and G. De Schutter*
- **PRO 59:** International RILEM Conference on On Site Assessment of Concrete, Masonry and Timber Structures SACoMaTiS 2008 (ISBN set: 978-2-35158-061-5); *Eds. L. Binda, M. di Prisco and R. Felicetti*

PRO 60: Seventh RILEM International Symposium on Fibre Reinforced Concrete: Design and Applications - BEFIB 2008 (ISBN: 978-2-35158-064-6); *Ed. R. Gettu*

PRO 61: 1st International Conference on Microstructure Related Durability of Cementitious Composites 2 vol., (ISBN: 978-2-35158-065-3); Eds. W. Sun, K. van Breugel, C. Miao, G. Ye and H. Chen

PRO 62: NSF/ RILEM Workshop: In-situ Evaluation of Historic Wood and Masonry Structures (e-ISBN: 978-2-35158-068-4); *Eds. B. Kasal, R. Anthony and M. Drdácký*

PRO 63: Concrete in Aggressive Aqueous Environments: Performance, Testing and Modelling, 2 vol., (ISBN: 978-2-35158-071-4); Eds. M. G. Alexander and A. Bertron

PRO 64: Long Term Performance of Cementitious Barriers and Reinforced Concrete in Nuclear Power Plants and Waste Management - NUCPERF 2009 (ISBN: 978-2-35158-072-1); Eds. V. L'Hostis, R. Gens, C. Gallé

PRO 65: Design Performance and Use of Self-consolidating Concrete - SCC'2009 (ISBN: 978-2-35158-073-8); Eds. C. Shi, Z. Yu, K. H. Khayat and P. Yan

PRO 66: 2nd International RILEM Workshop on Concrete Durability and Service Life Planning - ConcreteLife'09 (ISBN: 978-2-35158-074-5); *Ed. K. Kovler*

PRO 67: Repairs Mortars for Historic Masonry (e-ISBN: 978-2-35158-083-7); Ed. C. Groot

PRO 68: Proceedings of the 3rd International RILEM Symposium on 'Rheology of Cement Suspensions such as Fresh Concrete (ISBN 978-2-35158-091-2); Eds. O. H. Wallevik, S. Kubens and S. Oesterheld

PRO 69: 3rd International PhD Student Workshop on 'Modelling the Durability of Reinforced Concrete (ISBN: 978-2-35158-095-0); Eds. R. M. Ferreira, J. Gulikers and C. Andrade

PRO 70: 2nd International Conference on 'Service Life Design for Infrastructure' (ISBN set: 978-2-35158-096-7, e-ISBN: 978-2-35158-097-4); Ed. K. van Breugel, G. Ye and Y. Yuan

PRO 71: Advances in Civil Engineering Materials - The 50-year Teaching Anniversary of Prof. Sun Wei' (ISBN: 978-2-35158-098-1; e-ISBN: 978-2-35158-099-8); Eds. C. Miao, G. Ye, and H. Chen

PRO 72: First International Conference on 'Advances in Chemically-Activated Materials – CAM'2010' (2010), 264 pp, ISBN: 978-2-35158-101-8; e-ISBN: 978-2-35158-115-5, *Eds. Caijun Shi and Xiaodong Shen*

PRO 73: 2nd International Conference on 'Waste Engineering and Management - ICWEM 2010' (2010), 894 pp, ISBN: 978-2-35158-102-5; e-ISBN: 978-2-35158-103-2, *Eds. J. Zh. Xiao*, Y. *Zhang, M. S. Cheung and R. Chu*

PRO 74: International RILEM Conference on 'Use of Superabsorsorbent Polymers and Other New Addditives in Concrete' (2010) 374 pp., ISBN: 978-2-35158-104-9; e-ISBN: 978-2-35158-105-6;

Eds. O.M. Jensen, M.T. Hasholt, and S. Laustsen

PRO 75: International Conference on 'Material Science - 2nd ICTRC - Textile Reinforced Concrete - Theme 1' (2010) 436 pp., ISBN: 978-2-35158-106-3; e-ISBN: 978-2-35158-107-0; Ed. W. Brameshuber

PRO 76: International Conference on 'Material Science - HetMat - Modelling of Heterogeneous Materials - Theme 2' (2010) 255 pp., ISBN: 978-2-35158-108-7; e-ISBN: 978-2-35158-109-4; *Ed. W. Brameshuber*

PRO 77: International Conference on 'Material Science - AdIPoC - Additions Improving Properties of Concrete - Theme 3' (2010) 459 pp., ISBN: 978-2-35158-110-0; e-ISBN: 978-2-35158-111-7; Ed. W. Brameshuber

PRO 78: 2nd Historic Mortars Conference and RILEM TC 203-RHM Final Workshop – HMC2010 (2010) 1416 pp., e-ISBN: 978-2-35158-112-4; Eds J. Válek, C. Groot, and J. J. Hughes

PRO 79: International RILEM Conference on Advances in Construction Materials Through Science and Engineering (2011) 213 pp., e-ISBN: 978-2-35158-117-9; Eds Christopher Leung and K.T. Wan

PRO 80: 2nd International RILEM Conference on Concrete Spalling due to Fire Exposure (2011) 453 pp., ISBN: 978-2-35158-118-6, e-ISBN: 978-2-35158-119-3; *Eds E.A.B. Koenders and F. Dehn*

PRO 81: 2nd International RILEM Conference on Strain Hardening Cementitious Composites (SHCC2-Rio) (2011) 451 pp., ISBN: 978-2-35158-120-9, e-ISBN: 978-2-35158-121-6; Eds R.D. Toledo Filho, F.A. Silva, E.A.B. Koenders and E.M.R. Fairbairn

PRO 82: 2nd International RILEM Conference on Progress of Recycling in the Built Environment (2011) 507 pp., e-ISBN: 978-2-35158-122-3; *Eds V.M. John, E. Vazquez, S.C. Angulo and C. Ulsen*

PRO 83: 2nd International Conference on Microstructural-related Durability of Cementitious Composites (2012) 250 pp., ISBN: 978-2-35158-129-2; e-ISBN: 978-2-35158-123-0; *Eds G. Ye, K. van Breugel, W. Sun and C. Miao*

PRO 85: RILEM-JCI International Workshop on Crack Control of Mass Concrete and Related issues concerning Early-Age of Concrete Structures – ConCrack 3 – Control of Cracking in Concrete Structures 3 (2012) 237 pp., ISBN: 978-2-35158-125-4; e-ISBN: 978-2-35158-126-1; *Eds F. Toutlemonde and J.-M. Torrenti*

PRO 86: International Symposium on Life Cycle Assessment and Construction (2012) 414 pp., ISBN: 978-2-35158-127-8, e-ISBN: 978-2-35158-128-5; *Eds A. Ventura and C. de la Roche*

PRO 87: UHPFRC 2013 – RILEM-fib-AFGC International Symposium on Ultra-High Performance Fibre-Reinforced Concrete (2013), ISBN: 978-2-35158-130-8, e-ISBN: 978-2-35158-131-5; *Eds F. Toutlemonde*

PRO 88: 8th RILEM International Symposium on Fibre Reinforced Concrete (2012) 344 pp., ISBN: 978-2-35158-132-2, e-ISBN: 978-2-35158-133-9; Eds Joaquim A.O. Barros

PRO 89: RILEM International workshop on performance-based specification and control of concrete durability (2014) 678 pp, ISBN: 978-2-35158-135-3, e-ISBN: 978-2-35158-136-0; *Eds. D. Bjegović, H. Beushausen and M. Serdar*

PRO 90: 7th RILEM International Conference on Self-Compacting Concrete and of the 1st RILEM International Conference on Rheology and Processing of Construction Materials (2013) 396 pp, ISBN: 978-2-35158-137-7, e-ISBN: 978-2-35158-138-4, *Eds. Nicolas Roussel and Hela Bessaies-Bey*

PRO 91 draft: CONMOD 2014 - RILEM International Symposium on Concrete Modelling (2014), ISBN: 978-2-35158-139-1; e-ISBN: 978-2-35158-140-7,

PRO 92: CAM 2014 - 2nd International Conference on advances in chemically-activated materials (2014) 392 pp., ISBN: 978-2-35158-141-4; e-ISBN: 978-2-35158-142-1, Eds. Caijun Shi and Xiadong Shen

PRO 93: SCC 2014 - 3rd International Symposium on Design, Performance and Use of Self-Consolidating Concrete (2014) 438 pp., ISBN: 978-2-35158-143-8; e-ISBN: 978-2-35158-144-5, Eds. Caijun Shi, Zhihua Ou, Kamal H. Khayat

PRO 94 (online version): HPFRCC-7 - 7th RILEM conference on High performance fiber reinforced cement composites, e-ISBN: 978-2-35158-146-9, *Eds. H.W. Reinhardt, G.J. Parra-Montesinos, H. Garrecht*

PRO 95: International RILEM Conference on Application of superabsorbent polymers and other new admixtures in concrete construction, ISBN: 978-2-35158-147-6; e-ISBN: 978-2-35158-148-3, *Eds. Viktor Mechtcherine, Christof Schroefl*

PRO 96 (online version): XIII DBMC: XIII International Conference on Durability of Building Materials and Components, e-ISBN: 978-2-35158-149-0, *Eds. M. Quattrone, V.M. John*

PRO 97: SHCC3 – 3rd International RILEM Conference on Strain Hardening Cementitious Composites, ISBN: 978-2-35158-150-6; e-ISBN: 978-2-35158-151-3, *Eds. E. Schlangen, M.G. Sierra Beltran, M. Lukovic, G. Ye*

PRO 98: FERRO-11 – 11th International Symposium on Ferrocement and 3rd ICTRC – International Conference on Textile Reinforced Concrete, ISBN: 978-2-35158-152-0; e-ISBN: 978-2-35158-153-7

PRO 99: ICBBM 2015 - 1st International Conference on Bio-Based Building Materials, e-ISBN: 978-2-35158-154-4, *Eds. Sofiane Amziane, Mohammed Sonebi*

RILEM REPORTS (REP)

Report 19: Considerations for Use in Managing the Aging of Nuclear Power Plant Concrete Structures (ISBN: 2-912143-07-1); *Ed. D. J. Naus*

Report 20: Engineering and Transport Properties of the Interfacial Transition Zone in Cementitious Composites (ISBN: 2-912143-08-X); *Eds. M. G. Alexander, G. Arliguie, G. Ballivy, A. Bentur and J. Marchand*

Report 21: Durability of Building Sealants (ISBN: 2-912143-12-8); Ed. A. T. Wolf

Report 22: Sustainable Raw Materials - Construction and Demolition Waste

(ISBN: 2-912143-17-9); Eds. C. F. Hendriks and H. S. Pietersen

Report 23: Self-Compacting Concrete state-of-the-art report (ISBN: 2-912143-23-3); *Eds. Å. Skarendahl and Ö. Petersson*

Report 24: Workability and Rheology of Fresh Concrete: Compendium of Tests (ISBN: 2-912143-32-2); *Eds. P. J. M. Bartos, M. Sonebi and A. K. Tamimi*

Report 25: Early Age Cracking in Cementitious Systems (ISBN: 2-912143-33-0); Ed. A. Bentur

Report 26: Towards Sustainable Roofing (Joint Committee CIB/RILEM) (CD 07) (e-ISBN 978-2-912143-65-5); *Eds. Thomas W. Hutchinson and Keith Roberts*

Report 27: Condition Assessment of Roofs (Joint Committee CIB/RILEM) (CD 08) (e-ISBN 978-2-912143-66-2); *Ed. CIB W 83/RILEM TC166-RMS*

Report 28: Final report of RILEM TC 167-COM 'Characterisation of Old Mortars with Respect to Their Repair (ISBN: 978-2-912143-56-3); *Eds. C. Groot, G. Ashall and J. Hughes*

Report 29: Pavement Performance Prediction and Evaluation (PPPE): Interlaboratory Tests (e-ISBN: 2-912143-68-3); *Eds. M. Partl and H. Piber*

Report 30: Final Report of RILEM TC 198-URM 'Use of Recycled Materials' (ISBN: 2-912143-82-9; e-ISBN: 2-912143-69-1); Eds. Ch. F. Hendriks, G. M. T. Janssen and E. Vázquez

Report 31: Final Report of RILEM TC 185-ATC 'Advanced testing of cement-based materials during setting and hardening' (ISBN: 2-912143-81-0; e-ISBN: 2-912143-70-5); *Eds. H. W. Reinhardt and C. U. Grosse*

Report 32: Probabilistic Assessment of Existing Structures. A JCSS publication (ISBN 2-912143-24-1); *Ed. D. Diamantidis*

Report 33: State-of-the-Art Report of RILEM Technical Committee TC 184-IFE 'Industrial Floors' (ISBN 2-35158-006-0); *Ed. P. Seidler*

Report 34: Report of RILEM Technical Committee TC 147-FMB 'Fracture mechanics applications to anchorage and bond' Tension of Reinforced Concrete Prisms – Round Robin Analysis and Tests on Bond (e-ISBN 2-912143-91-8); *Eds. L. Elfgren and K. Noghabai*

Report 35: Final Report of RILEM Technical Committee TC 188-CSC 'Casting of Self Compacting Concrete' (ISBN 2-35158-001-X; e-ISBN: 2-912143-98-5); *Eds. Å. Skarendahl and P. Billberg*

Report 36: State-of-the-Art Report of RILEM Technical Committee TC 201-TRC 'Textile Reinforced Concrete' (ISBN 2-912143-99-3); Ed. W. Brameshuber

Report 37: State-of-the-Art Report of RILEM Technical Committee TC 192-ECM 'Environment-conscious construction materials and systems' (ISBN: 978-2-35158-053-0); *Eds. N. Kashino, D. Van Gemert and K. Imamoto*

Report 38: State-of-the-Art Report of RILEM Technical Committee TC 205-DSC 'Durability of Self-Compacting Concrete' (ISBN: 978-2-35158-048-6); *Eds. G. De Schutter and K. Audenaert*

Report 39: Final Report of RILEM Technical Committee TC 187-SOC 'Experimental determination of the stress-crack opening curve for concrete in tension' (ISBN 978-2-35158-049-3); *Ed. J. Planas*

Report 40: State-of-the-Art Report of RILEM Technical Committee TC 189-NEC 'Non-Destructive Evaluation of the Penetrability and Thickness of the Concrete Cover' (ISBN 978-2-35158-054-7);

Eds. R. Torrent and L. Fernández Luco

Report 41: State-of-the-Art Report of RILEM Technical Committee TC 196-ICC 'Internal Curing of Concrete' (ISBN 978-2-35158-009-7); *Eds. K. Kovler and O. M. Jensen*

Report 42: 'Acoustic Emission and Related Non-destructive Evaluation Techniques for Crack Detection and Damage Evaluation in Concrete' - Final Report of RILEM Technical Committee 212-ACD (e-ISBN: 978-2-35158-100-1); *Ed. M. Ohtsu*

Editors:

Marco Quattrone Vanderley M. John

Organizing Committee:

Ana Paula Werle Poli USP Carlos Alberto Moraes Borges Secovi SP - Co-chair Christiane Minami Secovi SP Eliany Funari Poli USP Engracia M Bartuciotti Poli USP Laerte Temple Secovi SP Marco Quattrone Poli USP Marcos Velletri Secovi SP Maria Angelica Covelo Silva NGI Consultoria Poli USP Mercia Maria S Barros Regina Maia Secovi SP Ronaldo Sá Secovi SP Sibele Sobires Secovi SP Vahan Agopyan Poli USP - Honorary Chair

Poli USP - Chair

POLIMI, Italy

Tesis

Steering Committee

Vanderley M. John

Vera Fernandes Hachich

Full members

Christer SJÖSTRÖM	CIB
Geert DE SCHUTTER	RILEM
Ralph PAROLI	ASTM
Vasco PEIXOTO DE	
FREITAS (Chair)	U Porto
Walter ROSSITER	NIST

Members at Large

Bruno DANIOTTI

Carmen ANDRADE	CSIC-UPM, Spain
Christian BRISCHKE	LUH/IBW, Germany
Chun-Qing 'LI	RMIT Univ., Australia
Dariusz GAWIN	GAWIN Univ. of Lodz, Poland
Hartwig M. KÜNZEL	Fraunhofer IBP, Germany
Julian HANS	CSTB, France
Kiang Hwee TAN	NUS, Singapore
Kribanandan GURUSAMY	
NAIDU	JTK/Consult., Malaysia
Michael LACASSE	NRC-Construction, Canada
Nil TÜRKERI	ITU, Turkey
Peter FLUELER	EMPA, Switzerland
Shiro NAKAJIMA	BRI, Japan
Vanderley M. JOHN	USP, Brazil

Scientific Committee

Angel Antonio DI MAIO

Angela MASUERO	Brazil
Antonio RODOLFO JR.	Brazil
Brian KYLE	Canada
Bruno DANIOTTI	Italy
Carmen ANDRADE	Spain
Christer SJÖSTRÖM	Sweden
Christian BRISCHKE	Denmark
Claudio de Souza KAZMIERCZAK	Brazil
Cleber Marcos RIBEIRO DIAS	Brazil
Dariusz GAWIN	Poland
Edgardo Fabián IRASSAR	Argentina
Eliane COSTA	Brazil
Fabio Domingos PANNONI	Brazil
Fernando Pacheco TORGAL	Portugal
Flavio Leal MARANHÃO	Brazil
Geert DE SCHUTTER	Belgium
Gibson R MEIRA	Brazil
Helena CORVACHO	Portugal
Holmer SCHMIDT	Brazil
Holm ANDREAS	Denmark
Jean-Luc CHEVALIER	France
Jorge de BRITO	Portugal
Julien HANS	France
Kai LOH	Brazil
Kiang HWEE TAN	Singapore
Luis BONIN	Brazil
Marcia Aiko SHIRAKAWA	Brazil
Marco QUATTRONE	Brazil
Maria Alba CINCOTTO	Brazil
Marlova KULAKOWSKI	Brazil
Maryangela G. LIMA	Brazil
Mickael THIERY	France
Nele DE BELIE	Belgium
Paul HOUANG	Brazil
Romildo TOLEDO-FILHO	Brazil
Rui BARBOSA DE SOUZA	Brazil
Sergio C. ANGULO	Brazil
Sergio CROCE	Italy
Shiro NAKAJIMA	Japan
Silvia VIEIRA	Brazil
Vanderley M. JOHN	Brazil
Vasco PEIXOTO DE FREITAS	Portugal
Walter ROSSITER	USA
Wolfram TRINIUS	Germany
Yury Andrés Villagrán ZACCARDI	Argentina
<u>*</u>	_

Argentina

EXPERIMENTAL EVALUATION OF PERFORMANCES OF DIFFERENT SOLUTIONS OF FINISHING FOR MASONRY BUILDINGS FOR DETERMINING DURABILITY

Nicolella, M. (1) and Iucolano, F. (2)

- (1) Department of Civil, Construction and Environmental Engineering, University of Naples Federico II, Naples maurizio.nicolella@unina.it
- Department of Chemical, Materials and Industrial Engineering, University of Naples Federico II, Naples iucolano@unina.it

ABSTRACT

The components of the building envelopes have to provide performances of different types: it is supposed to resist to the weather agents, to have a good water vapor permeability in order to prevent some degradation phenomena, and to inhibit the capillary rising dampness. But it must also maintain all these features over the time, in other words it must have a high durability. The designers, when they have to choose finishing solutions, are put in front of very complex evaluations, with the aim of finding the most appropriate one, given the specific context stress factors.

To provide a useful guide for those frequent situations, two Departments of University of Naples Federico II conducted combined tests in the laboratories and on the field, on four types of finishing solutions (plaster + painting) for tuff masonry, which is typical of Southern Italy.

In the DICMAPI laboratory the specimens were subjected to tests of water absorption by capillarity, tests of water vapor permeability, tests of water absorption at a low pressure, and tests of accelerated aging in a QUV machine.

The field assessments were carried out on 500 sampled buildings in the city of Naples, over 10 years of monitoring, showing the different behavior of the four types of selected specimens: for example, the characteristics of the finishing solutions of macroporous plaster + silicate paint and cement plaster + quartz paint have remained almost the same, without significant performance decay. The results could represent a good starting point for the creation of a useful handbook for designers of recovery interventions.

Keywords: durability, performances, laboratory test, masonry, plasters, paints.

1. INTRODUCTION

The most part of materials and building components provide multiple performances: for example, finishing materials used for perimetral walls are mainly characterized by esthetical needs, but also by necessities of protection towards the inside and, according to the latest laws about energy saving, often by needs of thermal insulation. Considering this multiplicity of performances they have to carry out, their context of stress is pretty various as well: sun, wind, dampness from different sources (rain, capillary rising dampness, condensation), and also mechanical stress, such as thermal variations, and phenomena of contraction.

Designers often find it hard to choose the products that suit the most a specific case, since the performances the components are needed for, may require totally opposite

characteristics. In addition to this, the producers' data sheets usually refer to the reactions of the single components themselves, rather than to their behavior when they are used in a "system" of materials, for example wall + plaster + finishing + paint.

So, while it is easy to get information about the water vapor permeability of a painting product, it is much more difficult to get it for an ensemble made up by tuff + plaster + skimming mortar + paint. And there is also the necessity to gather information about the combined action of rain and wind, and the effects of UV rays, dampness condensation, etc.

Then, it seemed particularly useful to carry out an experimental research on the ensemble of a building envelope, that requires the evaluation of reciprocal influences that should be carefully examined for the analysis of the behavior of the whole system, rather than on the behavior of a single component used in the external façade, and on the stress context that can be predicted for it. Then, it ultimately seemed appropriate to inspect on the permanence of the characteristic performances during the time, through durability tests carried out with two different approaches:

- tests on the field, monitoring the real behavior of the components, during ten years, when used in buildings with finishing solutions that will be further explained;
 - tests of accelerated aging in the laboratory with a QUV machine.

2. CRITERIA OF CHOICE OF SPECIMENS AND STRESS AGENTS

Choosing the typologies of specimens to use for the tests, it was decided to select the finishing solutions that are most used in the designing procedure of the recovering interventions, for buildings with tuff masonry, in the specific context of the city of Naples.

For this reason, we availed ourselves of the collaboration with the society S.I.Re.Na. – created by the City of Naples in order to promote the recovery of the historical center – that has collected of a database of more than 1200 interventions realized in the decade 2002-2012.

According to the statistical data, it resulted that the most used solutions were by far:

- a. plaster made up with lime mortar + lime paint (hereinafter called "B");
- b. plaster made up with "common" mortar (lime + plaster) + siloxane paint ("Gs");

In order to complete the extrapolation of the range of possibilities, two more solutions were chosen. These two appear to have opposite problems in relation to dampness:

- c. plaster made up with cement mortar + quartz paint ("Gc");
- d. macroporous plaster + breathable paint ("G").

The specimens were made up in the following modes:

- dimensions of yellow tuff specimens: $5 \times 5 \text{ cm} \times (5+1) \text{ cm} 16.0 \times 4.0 \times 2.0 +/-0.5 \text{ cm}$. only for the test in the QUV machine;
- finishing of the sides: plaster +paint on one side, bituminous liquid sheath on the other (fig. 1a).

Among the different performances that characterize the finishing of a tuff masonry, the following were mainly considered: (i) the faculty to resist decay because of the action of phenomena of capillary rising damp, (ii) the faculty of perspiration, (iii) the faculty to resist the action of rain, sun and condensation, (iv) the reaction of the material to these stress agents during the time.

So the following tests were prepared for the four different types of specimens: capillary water absorption, water vapor permeability, water absorption under low pressure, accelerated

aging in a QUV machine, in addition to the monitoring on the field, executed on about 500 buildings with the aim of evaluating the in-use behavior for the four solutions.

3. EXPERIMENTAL

3.1 Capillary water absorption

The amount of absorbed water was measured according to the European Standard EN 15801 which specifies a method for determining the water absorption by capillarity of porous inorganic materials. The method may be applied to porous inorganic materials either untreated or subjected to any treatment or ageing. Three specimens for every typology, parallelepiped shaped, were dried in an oven at 40°C until to obtain a constant mass. Subsequently, the specimens were placed on a multilayer of 5 mm of filter paper, soaked in deionized water, maintaining the water level constant during the test (see figure 1b). Starting from the placement on the multilayer, the samples were weighed at fixed times and the amount of absorbed water (A) was calculated using the equation: $A = [(m_i-m_0)/S]*1000$, where m_i is the specimen weight (g) at time t_i (\sqrt{s}), m_0 is the dry specimen weight (g) and S is the specimen surface (cm²) lying on the wet multilayer.

The capillary absorption coefficient (CA, expressed in mg·cm⁻²·s^{-1/2}) was also calculated at the end of the test for all the samples, using the equation: $CA = (A_{30} - A_0)/(t_{30})^{1/2}$, where A_{30} is the amount of water absorbed by the specimen per area unit after 30 min, A_0 is the intercept of the straight line obtained in the linear graph with the y-axis and $\sqrt{t_{30}}$ is the square root of the time (s) after 30 minutes.

3.2 Water vapor permeability

The permeability to water vapor is defined as the amount of water vapor flowing in the time unit and in the surface unit through a porous sample. It is expressed as the ratio between the weight variation of the whole system in 24 h and the area of the sample surface, under a constant difference of the vapor pressure of water (expressed in Kg/m²·s·Pa at 20°C), according to the European Standard EN 1015-19. The permeability test was carried out on three samples for each series, placed in Plexiglas vessels containing a saturated solution of potassium nitrate (KNO₃), capable of maintaining, at T = 20° C, a constant relative humidity H_R , equal to 93.2% (see figure 1c). Then the vessels were sealed and placed in a climatic chamber at T = 20° C and $H_R = 50$ %. The steam flow through the samples was then evaluated by measuring, at time intervals of 24 h, the mass variation of the containers. The test may be considered completed when, by plotting the values of the mass as a function of time, three points are arranged on a straight line, that is, when the mass changes are constants for at least three successive weightings. The data so obtained allowed to calculate, in accordance with the European Standard mentioned above, the water vapor permeability (WVP).

3.3 Water absorption under low pressure (pipe method)

This test is useful to simulate the effect of water absorbed for rain and/or for moisture condensation on different types of finishing. The measurement of the absorbed water allows to evaluate surface modifications, to characterize the effect of a treatment of impregnation altering the surface permeability or to characterize the effect of a natural weathering.

The water absorption was measured with the pipe method according to the RILEM II.4 standard and using the apparatus illustrated in figure 1d. The test is performed by applying a water column on the material under examination and measuring every 5 minutes the volume of water absorbed (directly by reading on the graduated glass tube), for a total time of 60 minutes. Based on the data collected during the test, it is possible to calculate the degree of

absorption of water at low pressure (WLP), obtained from the ratio between the difference of the water volume (ml) absorbed at the final time (Q_{tf}) and at 5 minutes (Q_{t5}), and the surface area (cm²) of contact of the cell (S), as follows: WLP = ($Q_{tf} - Q_{t5}$)/S.

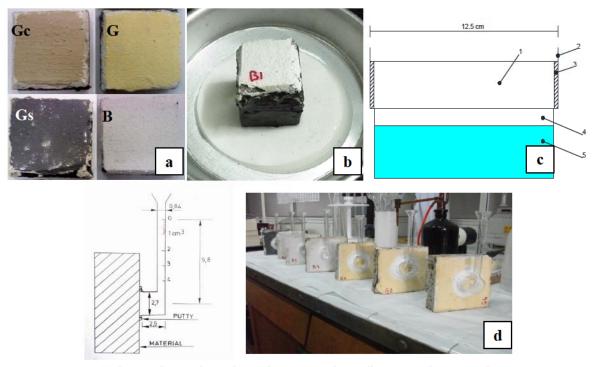


Figure 1: (a) four typologies of manufactured specimens; (b) capillary water absorption of a specimens placed on a wet multilayer;(c) scheme of apparatus for water vapor permeability test: (1) sample, (2) test vessel rectangular shaped, (3) putty, (4) air interspace (~ 10 mm), (5) saturated solution of potassium nitrate (KNO₃); (d) apparatus of water absorbed at low pressures (dimensions in cm).

3.4 Accelerated aging in a QUV machine

The enrollment of the test and the elaboration of the results were carried out taking account of the following standard: UNI 9922, UNI EN ISO 4628-1, UNI EN ISO 4618-2, UNI EN ISO 4628-1, using a machine with fluorescent QUV lamps. The QUV accelerated weathering tester reproduces the damage caused by sunlight, rain and dew. In a few days, the OUV tester can reproduce the damage that occurs over years outdoors. Differently from xenon arc test chambers, it doesn't reproduce the whole sun radiation, but only its damaging effects with a wavelength between 300 nm and 400 nm. It is based on the principle that the long-lasting materials are mainly affected by UV rays with short waves when used outdoors, and this is the primary cause of their atmospheric aging. To simulate outdoor weathering, the QUV tester exposes materials to alternating cycles of UV light and moisture at controlled, elevated temperatures. It simulates the effects of sunlight using special fluorescent UV lamps, and simulates dew and rain with condensing humidity and/or water spray. Before subjecting the specimens to the accelerated aging test, a chromatic characterization was carried out, realizing a number of color measurements between 5 and 7, thanks to the use of a spectrophotometer, which were then elaborated with the software Spectramatic NX. The testing cycle (see figure 2) was repeated for 32 times, exposing the specimens to 128 hours of radiation and 128 of condensation, for a total of 256 of exposition, and it was structured in a pattern described in tab.1. At the end of the testing cycles, the evaluation of the decay of the surface was realized using three tables, according to the UNI EN ISO 4628-1 standard. It

classifies the number and dimension of defects found, and the intensity of variations, as shown in tab 2. Concerning the intensity of the chromatic variation, it was evaluated by comparing (using the spectrophotometer) the colorimetric surveys (L*, u*, v*) of the stressed specimens with those of the unstressed ones. The color difference, in fact, can be calculated using the Euclidean distance of the (L*, u*, v*) co-ordinates. In colorimetry, the CIE 1976 (L*, u*, v*) color space, commonly known as CIELUV, is a color space adopted by the International Commission on Illumination (CIE) in 1976, as a simple-to-compute transformation of the 1931 CIE XYZ color space, but which attempted to a greater perceptual uniformity.

Table 1	Chart of t	he accelerated	aging evel	le in a (VIIC	machine
Table 1.	Chart Of t	ne accerciated	uging cycl	ic mi a v		macmin

SUB-CYCLES	DURATION	TEMPERATURE	SUNLIGHT RADIATION	CONDENSATION
SUNLIGHT RADIATION	4 hrs.	60°C	Yes	No
CONDENSATION	4 hrs.	50°C	No	Yes

Table 2. Chart of classification to indicate the defects and to measure the variations

Class.	Number of defects	Dimension of defects	Intensity of variations	
0	none, that is to say no detectable	not visible at a 10x zoom	unchanged, no detectable variations	
1	very few, a small, scarcely significant number of defects	only visible at a 10x zoom	very slight, a barely detectable variation	
2	few, a small but significant number	barely visible at common sight	slight, a clearly detectable variation	
3	moderate number of defects	clearly visible at common sight (to 0.5 mm)	moderate, a variation that can be detected very clearly	
4	considerable number of defects	from 0.5 mm to 5 mm	considerable, a determined variation	
5	dense disposition of defects	bigger than 5 mm	greatly marked variation	





Figure 2: The specimens subjected to accelerated aging in a QUV machine.

4. RESULTS AND DISCUSSION

Figure 3 shows a comparison between the 4 types of capillary absorption curves (each curve represents an average value of three experimental tests carried out for each type of specimen), together with a table which reports the average values of capillary absorption coefficients CA, calculated taking into account the linear portion of the curves.

The trend of the curves shows that in a first period (about 30-40 min) water absorption is substantially constant, while varying significantly when the rising water begins to affect the finishing layers, characterized by porosity (and hence absorption of water) very different from each other. Figure 4 reports a comparison between the 4 typologies of water vapor permeability curves (each curve represents an average value of three experimental tests carried out for each type of specimen), together with a table in which are reported the average

values of the water vapor permeability (W_{VP}) and the resistance to the steam diffusion (μ), together with some porosimetric characteristics of the four different finishing(porosity and average pore diameter). The trend of these curves shows that there are two different behaviors, closely related to the different slopes of the lines: "Gc" and "Gs" specimens exhibit a lower slope than "B" and "G" specimens, meaning that they present a lower W_{VP} and therefore a greater diffusion resistance u. These results are strongly correlated to the porosimetric data. In fact "Gc" and "Gs" specimens are manufactured with cement-based plasters, very compact, with as much compact paintings, while "B" and "G" are both manufactured with plaster and paintings characterized by higher porosity. Finally, figure 5 shows the curves related to the water absorption at low pressures (each curve represents an average value of three experimental tests carried out for each type of specimen), together with a table which summarizes the values of the W_{LP}. The behavior of these curves is substantially determined by the type of painting, more or less impermeable to water. Among the paints used in the present work, the lime paint (specimens "B") is definitely the most permeable to water, and this leads to W_{LP} values about 4 times higher than other materials. On the contrary, the small differences between the other three samples are related to the different substrates. It is interesting to note that, among the solutions evaluated in the present work, the typology "G" shows the higher water vapor permeability ($\mu = 6.40$) coupled with a low permeability to rainwater ($W_{LP} = 0.56$).



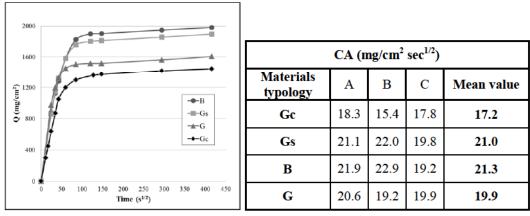


Figure 3: Capillary water absorption curves of the manufactured specimens.



Materials typology	Porosity (%)	D _m (μm)	W _{vp} (Kg/m·s·Pa)	
Gc	28.5	0.33	1.59E-11	12.19
Gs	28.6	0.63	1.96E-11	9.91
В	33.7	0.80	2.70E-11	7.19
G	47.9	8.22	3.04E-11	6.40

 $Figure\ 4:\ Water\ vapor\ permeability\ curves\ of\ the\ manufactured\ specimens.$



Materials typology	W_{LP} (ml H_2O/cm^2)
Gc	0.46
Gs	0.39
В	2.06
G	0.56

Figure 5: Low-pressure water absorption curves of the manufactured specimens.

Concerning the QUV tests, "G" and the "Gc" specimens were characterized by a general lack of decay, showing a good resistance to the accelerated aging cycles that were carried over. The "B" specimens have shown a slight superficial decay in the shape of a very thin fading, and of just visible cracks, and for this reason this decay involves both the paint, and the plaster. Finally, the "Gs" specimens show a significant decay, mainly characterized by a slight fading of the pictorical layer, and in particular by chalking, and clearly visible cracks.

The color difference, in the last column of the following table 4 (referred only to one of the series of specimens), is obtained with the formula $\Delta E = (\Delta L^2 + \Delta u^2 + \Delta v^2)^{1/2}$.

SERIES	PLASTER	PAINT	n° of samples	ΔE	Mean ∆E	Colour fading rating	
	Lime		1	2.09			
В		Lime	Lime 2 0.82 1.85	COLOUR FADING 1			
			3	2.64			
			1	0.90	-	COLOUR FADING 0	
G	Macroporous	Breathable	2	0.74			
					3 0.93	1	
			1	1.68			
Gc	Cement	Quartz	2	1.33	1.25	COLOUR FADING 0	
			3	0.73			
			1	1.54	2.21		
Gs	Lime - cement	Siloxan	2	1.53		COLOUR FADING 2	
			2	2 55		ฮ	

Table 4. Influence of the accelerated aging test on the color variation

On the field, as shown in figures 6 and 7, the buildings covered with lime plaster + lime paint and those with "common" mortar + siloxane paint, have been subject to more consequences than the others, because of rising dampness, micro-cracks, temperature variations. For what concerns performances of adhesion of the plasters on masonry, there have not been significant differences in ten years of monitoring. A previous project verified that the lack of adhesion begins from the 15th year.



Figure 6-7: micro-cracks and rising dampness in a building with "Gs" solution.

5. CONCLUSIONS

The tests have shown some important evidences:

- the "G" specimens are characterized by good results both in water vapor permeability and in water absorption at a low pressure tests: this is not a well-known information, and it is particularly useful for the designers of recovery interventions;
- also QUV tests show that "G" specimens have, over the time, only a little decay of initial characteristics;
- the behavior of "Gs", the most used solution in the recovery interventions in the last 10 years in the city of Naples, is the worst among the selected specimens;
- all the results that have just been exposed, actually, find a direct correspondence in what it
 was possible to observe in all the tested buildings of the centre of Naples;
- during the first ten years of monitoring, the tests on the field effectively showed that the
 finishing solutions of macroporous plaster + silicate paint and cement plaster + quartz
 paint have a higher attitude to last during the time for the respective characteristics, with
 the condition that the designers choose the most fitting solution, not considering the real
 context of the stress agents;
- the conducted tests seem to confirm the importance of knowing the real performances of the whole system rather than of a single component, especially in relation to a predetermined stressing context;
- the goal is the creation of a handbook for designers, in order to lead to a choice of more appropriate and durable building components.

REFERENCES

- [1] Maggi, P. N., 'La qualità tecnologica dei componenti edilizi. La durabilità' (Epitesto, Milan, 2000).
- [2] Daniotti, B. and Iacono, P. 'Long-term degradation under outdoor exposure conditions', Proceedings of International Workshop on "Management of Durability in the Building Process", (Milan, 2003).
- [3] Escobar, L.A. and Meeker, W.Q., Planning Accelerated Life Tests with 2 or More Experimental Factors (Technometrics, 1995).
- [4] Escobar, L.A. and Meeker, W.Q., 'A review of accelerated test models' (Statistical Science, 2006).
- [5] Gu, X.H., Sung, L., Kidah, B., Oudina, M., Clerici, C., Hu, H.Q., Stanley, D., Byrd, W.E., Jean, J.Y.C., Nguyen, T., and Martin, J.W., 'Multiscale physical characterization of an outdoor-exposed polymeric coating system' (Journal of Coatings Technology and Research, 2009).
- [6] Klemann, B.M., 'Correlations Between Xenon Arc Accelerated Weathering Tests and Outdoor Weathering' (Material Testing Product and Technology News, 2005).
- [7] Martin, J.W. and Bauer, D.R., 'Service Life Prediction Methodology and Metrologies', ACS Symposium series 805 (American Chemical Society, 2002).
- [8] Martin, J. W. et al., 'Methodologies for predicting the service lives of coating systems', NIST Building Science Series 172 (National Institute of Standards and Technology, Gaithersburg, MD, USA, 1994).
- [9] Martin, J.W., Saunders, S.C., Floyd, F.L., and Wineburg, J.P., 'Methodologies for Predicting the Service Life of Coating Systems', Federation of Societies for Coatings Technology (Monograph Series, Blue Bell, PA, 1996).

- [10] Nicolella, M., 'Programmazione degli interventi in edilizia Guida al libretto di manutenzione del fabbricato', (UNI, Milan, 2003).
- [11] Nicolella M., and De Pascale A., 'A model for determining accelerated ageing cycles in durability research: a case study on continuous roofing' (Proceedings of 11DBMC, Istanbul, 2008).
- [12] Schutz, E., Berger, F., Dirckx, O., and Chambaudet, A., Study of degradation mechanisms of a paint coating during an artificial aging test' (Polymer Degradation and Stability, 1999).
- [13] Teruzzi, T. Jornet, A., 'Artificial weathering of building components: experimental results on external walls' (Proceedings of 9th DBMC, Brisbane, Australia, 2002).
- [14] BS 7543:1992 Guide to Durability of Buildings and Building Elements, Products and Components. British Standards Institution, London, UK.
- [15] CIB (2004b) Guide and bibliography to service life and durability research for buildings and components – Council for Research and Innovation in Building and Construction, CIB Report Publication 295, Rotterdam, The Netherlands.
- [16] EN ISO 4628-1 Evaluation of coverings decay.
- [17] RILEM (1989): Systematic methodology for service life prediction of building materials and components. RILEM Recommendation, Materials and Structures, Vol. 22, pp. 385-392.
- [18] RILEM II.4: Water absorption under low pressure (pipe method), in: RILEM 25-PEM, Recommandations provisoires. Essais recommandés pour mesurer l'altération des pierres et évaluer l'éfficacité des méthodes de traitement. Matériaux et Construction, vol. 13, No. 75 (1980).
- [19] UNI EN 15801: Conservation of cultural property Test methods Determination of water absorption by capillarity (2010).
- [20] UNI EN 1015-19: Methods of test for mortar for masonry Part 19: Determination of water vapour permeability of hardened rendering and plastering mortars (2008).
- [21] UNI 9922 Determination of resistance to light exposition (UV) and to condensation water.
- [22] UNI ASTM E 632-82 Standard Practice for Developing Accelerated Test to Aid Prediction of the Service Life of Building Components and Materials.