Current Topics and Trends on Durability of Building Materials and Components

Carles Serrat, Joan Ramon Casas and Vicente Gibert (Eds.)

Current Topics and Trends on Durability of Building Materials and Components

Proceedings of the XV edition of the International Conference on Durability of Building Materials and Components (DBMC 2020)
Barcelona, Spain
20 – 23 October 2020

Edited by

Carles Serrat
Dept. of Mathematics

Joan Ramon Casas
Dept. of Civil and Environmental Engineering

Vicente Gibert
Dept. of Architectural Technology

Universitat Politècnica de Catalunya-BarcelonaTECH, Catalonia, Spain

A publication of:
International Center for Numerical Methods in Engineering (CIMNE)
Barcelona, Spain

Current Topics and Trends on Durability of Building Materials and Components

Carles Serrat, Joan Ramon Casas and Vicente Gibert (Eds.)

First edition, October 2020

ISBN: 978-84-121101-8-0

Cover: Basilica of the Sagrada Família. Spiral staircase inside the Nativity towers. Photo (c) Pere Vivas. Triangle Books. Sagrada Família.

Printed by: Artes Gráficas Torres S.L., Huelva 9, 08940 Cornellà de Llobregat, Spain

TABLE OF CONTENTS

ORGANIZING ASSOCIATIONS

American Society for Testing and Materials (ASTM)

International Council for Research and Innovation in Building Construction (CIB)

International Union of Testing and Research Laboratories for Materials and Structures (RILEM)

National Institute of Standards and Technology (NIST)

National Research Council Canada (NRC-CNRC)

ORGANIZERS AND COMMITTEES

ORGANIZING COMMITTEE

Carles Serrat i Piè
Chair
Department of Mathematics
EPSEB, Barcelona, Spain

Joan Ramon Casas i Rius
Department of Civil and Environmental Engineering
ETSECCPB, Barcelona, Spain

Vicente Gibert i Armengol
Department of Architectural Technology
ETSAB, Barcelona, Spain

STEERING COMMITTEE

Organizing Members

- Geert De Schutter, RILEM (Chair)
- Jennifer Keegan, ASTM
- Jorge De Brito, CIB
- Christopher C. White, NIST
- Michael Lacasse, NRC-CRC

Members at Large

- Robert Amor, The University of Auckland, New Zealand
- Carmen Andrade, CIMNE, Spain
- Christian Brischke, University of Göttingen, Germany
- Bruno Daniotti, Politecnico de Milano, Italy
- Vasco Peixoto De Freitas, FEUP, Portugal
- Peter Flüeler, m ETH/EMPA, Switzerland
- Dariusz Gawin, University of Lodz, Poland
- Julien Hans, CSTB, France
- Vanderley John, USP, Brazil
- Chun-Qing Li, RMIT University, Australia
- Isabel María Martínez, IETcc-CSIC, Spain
- Hiroyuki Miyauchi, BRI, Japan
- Shiro Nakajima, Utsunomiya University, Japan
- Carles Serrat, Universitat Politècnica de Catalunya-BarcelonaTECH, Spain
- Kiang Hwee Tan, NUS, Singapore
- Nil Turkeri, ITU, Turkey

UPC INSTITUTIONAL COMMITTEE

- Francesc Torres (Chair), President of UPC-BarcelonaTECH
- Jordi Berenguer, Vice-rector for Knowledge Transfer and Innovation of UPC-BarcelonaTECH
- Inmaculada Rodríguez, Dean of Barcelona School of Building Construction (EPSEB)
- Pedro Díez, Dean of Barcelona School of Civil Engineering (ETSECCPB)
- Félix Solaguren-Beascoa, Dean of Barcelona School of Architecture (ETSAB)
- Albert Cuchi, Dean of Vallès School of Architecture (ETSAV)
- Eugenio Oñate, Chair of Executive Council of the International Center for Numerical Methods in Engineering (CIMNE)
- Carles Serrat, Chair of the DBMC 2020 Conference

SCIENTIFIC COMMITTEE

Chairs
- Joan Ramon Casas (Co-Chair), UPC-Barcelona TECH, Spain
- Carmen Andrade (Co-Chair), CIMNE, Spain

Vice-Chairs
- Antonio Aguado, UPC-Barcelona TECH, Spain
- Túlio Bittencourt, University of São Paulo, Brazil
- Nele De Belie, University of Ghent, Belgium
- Ravindra Gettu, IIT Madras, India
- Rade Hajdin, IMC GmbH, Zürich & Belgrade Univ.
- Michael Lacasse, NRC Construction Research Centre, Canada
- Fernanda Rodrigues, Universidade de Aveiro, Portugal
- Elisabetta Rosina, Politecnico di Milano, Italy
- Ana Silva, IST, Lisbon, Portugal
- Alfred Strauss, BOKU, Vienna, Austria

Members
- Bijan Adl-Zarrabi, Chalmers University of Technology, Sweden
- Mark Ahrens, University Bochum, Germany
- Ahu Aydogan, City College of New York, USA
- Diana Bajare, Riga Technical University, Latvia
- Véronique Baroghel-Bouny, IFSTTAR, France
- Pablo Daniel Benítez-Mongelós, National University of Itapúa, Paraguay
- Umberto Berardi, Ryerson University, Canada
- Susan A. Bernal, University of Leeds, Leeds, UK
- Hans Beushausen, UCT, South-Africa
- Tomasz Blaszczynski, Poznan University of Technology, Poland
- Violeta Bokan-Bosiljkov, U. Ljubljana, Slovenia
- Mark Bomberg, Syracuse University, NY, USA
- Alessandra Bonazza, CNR, Italy
- Anatolijs Borodinecs, Riga Technical University, Latvia
- Lars Boström, SP, Sweden
- Kathryn Bourke, Whole Life Ltd, Watford, UK
- Thomas Braml, Bundeswehr University Munich, Germany
- Christian Brischke, University of Goettingen, Germany
- Zeynep Basaran Bundur, Özyegin University, Istanbul, Turkey
- Stefan Burtscher, TU Wien, burtscher consulting GmbH, Austria
- Guido Camata, University G. D´Annunzio, Chieti Pescara, Italy
- Jan Carmeliet, ETH Zürich, Switzerland
- Diana Car-Pušic, University of Rijeka, Croatia
- Robby Caspeele, University of Ghent, Belgium
- Anna Cellmer, Koszalin University of Technology, Poland
- Michael Chew, National University of Singapore, Singapore
- Sheila M.A. Conejos, School of Science and Technology, Singapore University of Social Sciences, Singapore
- Anca Constantin, Ovidius University of Constanta, Romania
- Bart Craeye, University of Antwerp, Belgium
- Paulo Cruz, University of Minho, Portugal
- Meri Cvetkovska, Ss. Cyril and Methodius University in Skopje, Republic of Macedonia
- Martin Cyr, INSA Toulouse, France
- Bruno Daniotti, Politecnico di Milano, Italy
- Jorge De Brito, Instituto Superior Tecnico, Technical University of Lisbon, Portugal
- Gianmarco De Felice, Università degli Studi Roma Tre, Italy
- Vasco Peixoto De Freitas, U. Porto, Portugal
- Dominique Derome, EMPA, Switzerland

- Josée Duchesne, Université Laval, Quebec, Canada
- Vilma Ducman, Slovenian National Building and Civil Engineering Institute, Slovenia
- Miren Etxeberria, UPC-BarcelonaTECH, Spain
- Flora Faleschini, Università degli Studi di Padova, Italy
- Ines Flores-Colen, Instituto Superior Técnico, University of Lisbon, Portugal
- David Garcia, UPC-BarcelonaTECH, Spain
- Dariusz Gawin, Lodz University of Technology, Poland
- Hua Ge, Concordia University, Montreal, Canada
- Jennifer Gerbi, U.S. Department of Energy, USA
- Michel Ghosn, City College New York, USA
- José Manuel Gómez Soberón, UPC-BarcelonaTECH, Spain
- Klodian Gradeci, SINTEF Building and Infrastructure, Trondheim, Norway
- Elke Gruyaert, KU Leuven, Belgium
- Lars Gullbrekken, SINTEF Building and Infrastructure, Trondheim, Norway
- Guillaume Habert, ETH Zürich, Switzerland
- Carl-Eric Hagentoft, Chalmers University of Technology, Sweden
- Tomáš Hanák, Brno University of Technology, Czech Republic
- Michael Hansen, TU Hannover, Germany
- Laia Haurie, UPC-BarcelonaTECH, Spain
- Shuichi Hokoi, Kyoto University, Japan
- Vít Hromádka, Brno University of Technology, Czech Republic
- Aletheia Ida, University of Arizona, USA
- Simo Ilomets, Tallinn University of Technology, Estonia
- Kei-Ichi Imamoto, Tokyo University of Science, Japan
- Joanna Janicka, University of Warmia and Mazury in Olsztyn, Poland
- Hans Janssen, KU Leuven, Belgium
- Pär Johansson, Chalmers University of Technology, Göteborg, Sweden
- Harald Justnes, SINTEF, Norway
- Targo Kalamees, Tallinn University of Technology, Estonia
- Mohammad Arif Kamal, Aligarh Muslim University, India
- Janis Kaminskis, Riga Technical University, Latvia
- Amnon Katz, Technion, Haifa, Israel
- Jacek Katzer, Koszalin University of Technology, Poland
- Miroslav Komljenovic, University of Belgrade, Serbia
- Kinga Korniejenko, Cracow University of Technology, Poland
- Jana Korytárová, Brno University of Technology, Czech Republic
- Jarek Kurnitski, Tallinn University of Technology, Estonia
- Joao Labrincha, University of Aveiro, Portugal
- Roman Lackner, UIBK, Innsbruck, Austria
- Akos Lakatos, Universiy of Debrecen, Hungary
- Paulo Laurenço, University of Minho, Portugal
- Elizabeth Laycock, Sheffield Hallam University, UK
- Agnieszka Lesniak, Cracow University of Technology, Poland
- Mae-Ling Lokko, Rensselaer Polytechnic Institute, USA
- Barbara Lothenbach, EMPA, Duebendorf, Switzerland
- Zoubir Lounis, National Research Council Canada, Canada
- Lyuben Lyubenov, University of Structural Engineering & Architecture, Bulgaria
- Ana Mandic Ivankovic, University of Zagreb, Croatia
- Mihajlo Markovic, University of Banja Luka, Bosnia and Herzegovina
- Ivan Marovic, University of Rijeka, Croatia
- Isabel Milagre Martins, LNEC, Portugal
- Berardo Matalucci, SHoP Architects, USA
- Jose Matos, University of Minho, Portugal
- José António Raimundo Mendes da Silva, Universidade de Coimbra, Portugal
- Esperanza Menéndez Méndez, Institute of Construction Science Eduardo Torroja (CSIC), Spain
- José Filipe Miranda-Melo, University of Porto, Portugal
- Eva Møller, Technical University of Denmark

- Sergio Montelpare, University G. D´Annunzio, Chieti Pescara, Italy
- Travis Moore, National Research Council Canada, Ottawa, Canada
- Martin Morelli, Aalborg University, Copenhagen, Denmark
- Vahid Nik, Lund University, Sweden
- María Nogal, Delft University of Technology, the Netherlands
- Takafumi Noguchi, University of Tokyo, Japan
- Ehsan Noroozinejad, Graduate University of Advanced Technology, Iran
- Daniel Oliveira, University of Minho, Portugal
- Fernando Pacheco Torgal, University of Minho, Portugal
- Ainars Paeglitis, Riga Technical University, Latvia
- Cedric Patapy, Laboratoire Matériaux et Durabilité des Constructions – INSA Toulouse/UPS, France
- Marco Perino, Politecnico di Torino, Italy
- Ruut Peuhkuri, Aalborg University, Copenhagen, Denmark
- Edyta Plebankiewicz, Cracow University of Technology, Poland
- Gul Polat, Istanbul Technical University, Turkey
- Ioana Popescu, IHE Delft Institute for Water Education, the Netherlands
- Andres J. Prieto, Universidad Austral de Chile, Valdivia, Chile
- John Provis, University of Sheffield, UK
- Elzbieta Radziszewska-Zielina, Cracow University of Technology, Poland
- Laura Rampazzi, University of Insubria, Italy
- Nuno Ramos, FEUP, University of Porto, Portugal
- Jacek Rapinski, University of Warmia and Mazury in Olsztyn, Poland
- Marzieh Riahinezhad, National Research Council Canada, Ottawa, Canada
- Pere Roca, UPC-BarcelonaTECH, Spain
- Hugo Rodrigues, Polytechnic of Leiria, Portugal
- Staf Roels, KU Leuven, Belgium
- Petra Rüther, SINTEF Building and Infrastructure, Trondheim, Norway
- Hiroaki Saito, Ashikaga University, Japan
- Antonio Sansonetti, CNR, Italy
- Amaia Santamaría, Universidad del País Vasco, Bilbao, Spain
- Mats Santamouris, University of Athens, Greece
- Karma Sawyer, U.S. Department of Energy, USA
- Erik Schlangen, TU Delft, the Netherlands
- Lina Seduikyte, Kaunas University of Technologies, Lithuania
- Dmitrijs Serdjuks, Riga Technical University, Latvia
- Igal M. Shohet, Ben-Gurion University of Negev, Israel
- Carey Simonson, University of Saskatchewan, Canada
- Gintautas Skripkiunas, Vilnius Gediminas Technical University, Lithuania
- Mohamed Sonebi, Queens University, Belfast, UK
- Wil Srubar, University of Colorado Boulder, USA
- Sudip Talukdar, British Columbia Institute of Technology, Burnaby, Canada
- Kiang Hwee Tan, National University of Singapore, Singapore
- Luping Tang, Chalmers University of Technology, Sweden
- Fitsum Tariku, British Columbia Institute of Technology, Burnaby, Canada
- Nicola Tarque, Pontificia Universidad Católica del Perú, Perú
- Akos Torok, Budapest University of Technology and Economics, Hungary
- Milan Trivunic, University of Novi Sad, Serbia
- Nil Türkeri, Istanbul Techn Univ, Turkey
- Maria Rosa Valluzzi, University of Padova, Italy
- Joris Van Acker, UGent, Belgium
- Keith Van de Riet, University of Kansas, USA
- Nathan Van Den Bossche, Ghent University, Belgium
- Philip Van Den Heede, Ghent University, Belgium
- Humberto Varum, University of Porto, Porto, Portugal
- Marius Vendrell, University of Barcelona, Spain
- Anne Ventura, IFSTTAR, France
- Yury Villagran, LEMIT, La Plata, Argentina

- Martins Vilnitis, Riga Technical University, Latvia
- Eva Vitkova, Brno Univeristy of Technology, Czech Republic
- Jeroen Vrijders, Belgian Building Research Institute, Belgium
- Johan Vyncke, Belgian Building Research Institute, Belgium
- Lin Wang, Concordia University, Montreal, Canada
- John A. Wells, Crosier Kilgour and Partners Ltd., Winnipeg, Canada
- Guang Ye, TU Delft, the Netherlands
- Joan Lluís Zamora, UPC-BarcelonaTECH, Spain
- Mariano Angelo Zanini, Università degli Studi di Padova, Italy
- Cristina Zanotti, University of British Columbia, Canada
- John Zhai, University of Colorado Boulder, USA
- Xiaohai Zhou, EMPA, Switzerland
- Valentina Žileska-Pancovska, Ss. Cyril and Methodius University in Skopje, Republic of Macedonia

LOCAL ORGANIZING COMMITTEE

Chairs
- Vicente Gibert, UPC-BarcelonaTECH, Spain

Members
- Cindy Abbott-Brito
- Ronny S. Guarderas-Luna
- Laia Haurie, EPSEB
- Beatriz D. Médola
- Climent Molins, ETSECCPB
- Joan Moreno, ETSAV
- Ana-Belén Onecha, ETSAB
- Javier E. Peñuelas
- Verónica Royano
- Alejandra Valencia-Arboleda

SUMMARY

KEYNOTE

SPECIAL SESSIONS

CONFERENCE TOPIC SESSIONS

CONTENTS

KEYNOTE

SPECIAL SESSIONS

Approaches to Hygrothermal Simulation for Assessing Durability Related to Climate Change

Organized by Travis Moore (NRC, Canada) and Michael Lacasse (NRC, Canada)

Biomimetic and Bioinspired Approaches for Enhanced Durability of Cementitious Materials

Organized by Wil Srubar (University of Colorado Boulder, USA) and Zeynep Basaran Bundur (Özyegin University, Istanbul, Turkey)

Degradation of Coating Materials and its Relation to Durability of Structures

Organized by Takafumi Noguchi (University of Tokyo, Japan) and Kei-ichi Imamoto (Tokyo University of Science, Japan)

Durability and Field Tests of Thermal Insulating and Innovative Constructive Solutions

Organized by Ines Flores-Colen (IST, University of Lisbon, Portugal) and Nuno Ramos (FEUP, University of Porto, Portugal)

Durability and Performance of Building Envelopes

Organized by Klodian Gradeci (SINTEF Building and Infrastructure, Trondheim, Norway) and Petra Rüther (SINTEF Building and Infrastructure, Trondheim, Norway)

Durability Considering Climate Change and Natural Hazards

Organized by Michael Lacasse (NRC, Canada) and Travis Moore (NRC, Canada)

Environmental Factors and Durability

Organized by Tomasz Blaszczynski (Poznan University of Technology, Poland)

Life Cycle Costs in Construction Projects

Organized by Vít Hromádka (Brno University of Technology, Czech Republic) and Edyta Plebankiewicz (Cracow University of Technology, Poland)

Modern Sustainable Building Materials and Technologies

Organized by Elzbieta Radziszewska-Zielina (Cracow University of Technology, Poland)

Performance Over Time of High-Performance Insulation and Reflective Building Envelope Materials

Organized by Umberto Berardi (Ryerson University, Canada) and Marco Perino (Politecnico of Turin, Italy)

Remote Sensing of Building Condition

Organized by Joanna Janicka (University of Warmia and Mazuri in Olsztyn, Poland) and Jacek Rapinski (University of Warmia and Mazuri in Olsztyn, Poland)

Slags in Cement-based Materials

Organized by Flora Faleschini (Università degli Studi di Padova, Italy) and Amaia Santamaria (Universidad del País Vasco, Bilbao, Spain)

Soft Computing Tools and Sustainable Building Construction and Maintenance

Organized by Diana Car-Pušic (University of Rijeka, Croatia) and Ivan Marovic (University of Rijeka, Croatia)

CONFERENCE TOPIC SESSIONS

Asset and Maintenance Management

Organized by Ana Silva (IST, Lisbon, Portugal)

Building Pathology and Durability

Organized by Túlio Bittencourt (University of São Paulo, Brazil)

Building Physics and Durability

Organized by Antonio Aguado (UPC-BarcelonaTECH, Spain)

Durability Approach for Historical and Old Buildings

Organized by Elisabetta Rosina (Politecnico di Milano, Italy)

Durability of Materials, Systems and Components

Organized by Ravindra Gettu (IIT Madras, India)

IT / BIM and Durability

Organized by Rade Hajdin (IMC GmbH, Zürich & Belgrade Univ)

Large Sample Size Studies in Durability

Organized by Fernanda Rodrigues (Universidade de Aveiro, Portugal)

LCA, Sustainability and Durable Construction

Organized by Nele De Belie (University of Ghent, Belgium)

Service Life Prediction Methodologies

Organized by Alfred Strauss (BOKU, Vienna, Austria)

XV International Conference on Durability of Building Materials and Components
DBMC 2020, Barcelona
C. Serrat, J.R. Casas and V. Gibert (Eds)

Durability of Mortars Packaged with Production Waste of Autoclaved Aerated Concrete

Maurizio Nicolella[1], Claudio Scognamillo[2] and Federica Vitale[3]

[1] Department of Civil, Architectural and Environmental Engineering (DICEA), University of Naples Federico II, 80125-Naples, Italy, maurizio.nicolella@unina.it

[2] Department of Civil, Architectural and Environmental Engineering (DICEA), University of Naples Federico II, 80125-Naples, Italy, claudio.scognamillo@unina.it

[3] Department of Civil, Architectural and Environmental Engineering (DICEA), University of Naples Federico II, 80125-Naples, Italy, federica.vitale@unina.it

Abstract. *The building sector is responsible for the introduction of about 40% of the waste in the environment (60 Mtons per year in Italy), with serious consequences for our future. Therefore, the statistics of the last few years have induced many researchers and many companies to investigate more sustainable products and technologies. Among these strategies, the re-use of waste materials has been widely encouraged. Many solutions have been proposed in the field of mortars for which the use of waste products such as ceramic materials, polystyrene, clay, concrete, has been tried out. The results have often been encouraging, especially for masonry mortars. Nevertheless, very few attempts have been made to place this type of products on the market. Moreover, the "younger" building materials such as Autoclaved Aerated Concrete have not been fully investigated in their potential use as recycled aggregates. The goal of this research was to evaluate the characteristics of mortars packaged with different percentages of production waste of Autoclaved Aerated Concrete components as aggregates, in order to assess the possible use of these conglomerates as masonry mortars or as plasters. The first campaign included tests for determining mechanical resistance, density, capillary water absorption, adherence to substrate, resistance to carbonation. The tested mortars had satisfactory mechanical characteristics and generally exhibited a good capacity to withstand the actions of atmospheric agents. Finally, the results highlighted the direct connection between Autoclaved Aerated Concrete percentage and mechanical and durability properties.*

Keywords: *Building Materials Production Waste, Carbonation, Lightweight Aggregates, Recycled Conglomerates, Sustainability.*

1 Introduction

The reuse of building waste materials in sustainable concretes or mortars has raised over the last years due to the environmental impact of building constructions. Building materials production waste is preferred rather than Construction and Demolition one due to its controlled chemical composition. The replacement of ordinary aggregates with production waste ones generally affects the mechanical performances of concretes or mortars owing to the low density of recycled aggregates (de Brito *et al.,* 2005; Ćosić *et al.*, 2015).

Nepomuceno, Isidoro and Catarino (2018) suggested a 30% threshold value of volume-replacement percentage of natural coarse aggregate with recycled ceramic in case of structural concrete. Actually, an increase of porosity and of average pore diameter is observed when the recycled aggregates are used (Anastasiou *et al.,*2018; Dang *et al.*, 2019). The accretion of

macropores and the reduction of micropores increases the resistance to external sulphate attack as a consequence of the lower capillary pores transport phenomena (Coppola *et al*., 2018). Moreover, the porosity improves the thermal insulation performances of mortars (Khan, 2002; Mendes *et al*., 2019).

Despite the raising interest on recycled lightweight aggregates, it is presently unclear whether the high porous structure of the recycled conglomerates affects their durability due to the microstructural changes induced by the aggregates. In particular, the relation between recycled mortars morphology and their carbonation resistance has not been fully investigated.

In order to analyze the effects of the use of a production waste lightweight material on the physical, the mechanical and the resistance to carbonation properties of conglomerates, five groups of mortars packaged with an increasing percentage by mass of Autoclaved Aerated Concrete (AAC) recycled aggregates were tested and compared. The changes in density, porosity, water adsorption, mechanical strengths and carbonation depths were measured.

The results of this study may be used to define the threshold of AAC aggregate percentage with the respect to the application of conglomerate as masonry mortars or as renderings and plasters.

2 Materials and Methods

2.1 Materials

The tested mortars were packaged with natural hydraulic lime (NHL 5 according to UNI EN 459-1:2010 standard) supplied by TSCcalce.

A natural siliceous sand and a recycled Autoclaved Aerated Concrete were used as aggregates. The natural sand was provided by Bacchi s.p.a and its apparent density, stated by the manufacturer, was 1460 kg/m^3. The recycled aggregate was supplied by Bacchi s.p.a, resulted from the production waste of Autoclaved Aerated Concrete (AAC) wall components. The particles size distribution of the recycled aggregate was measured through the dry sieving method according to UNI EN 933-1: 2012 and it is shown in Figure 1.

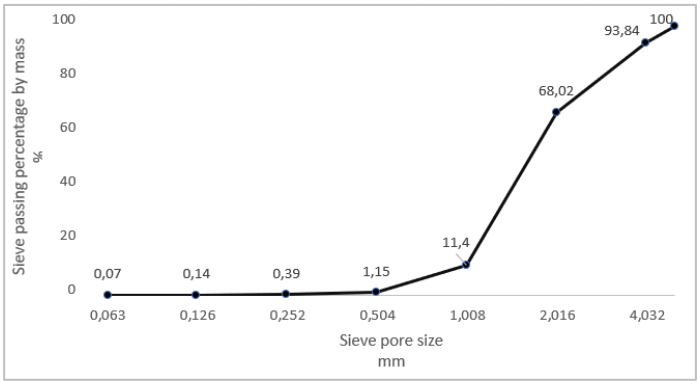

Figure 1. Particle size distribution of Autoclaved Aerated Concrete recycled aggregates according to the sieving test method.

The particle density and the water adsorption of AAC aggregates were analyzed according to UNI EN 1097-6:2013 pycnometer method for aggregate particles passing 4 mm test sieve and retained on the 0,063 mm test sieve. The outcomes are shown in Table 1.

Table 1. Particle density and water adsorption of Autoclaved Aerated Comcrete recycled aggregates.

M1 (g)	M2 (g)	M3 (g)	M4 (g)	ρ_{rd} (kg/m^3)	ρ_{ssd} (kg/m^3)	ρ_a (kg/m^3)	W (%)
77,93	477,73	452,29	45,11	860	1480	2290	72,76

M1, saturated and surface dried mass in air; M2, mass of pycnometer containing the saturated aggregate sample and the water; M3, mass of pycnometer filled with water only; ρ_{rd}, oven dried particle density; ρ_{ssd}, saturated and surface dried particle density; ρ_a, apparent particle density; W, water adsorption.

The chemical composition of the recycled aggregates was determined by a ThermoGravimetric Analysis (TGA) using a Netzsch- STA 409 PC Luxx apparatus. The mass losses of an AAC aggregate sample of 20 mg were monitored over time as the sample was heated in a controlled atmosphere. The temperature ranged from 23° to 1200° with a 10°/min heating rate. The mineralogical composition of AAC aggregates was analyzed by X-ray Diffraction (XRD) technique using a Philips X'pert PRO multipurpose powder diffractometer with X-ray wavelength of 1,54 Å. The outcomes were compared with the standard patterns of the International Centre for Diffraction Data database. The main mineralogical phases were Silicon Oxide, Calcium Carbonate, Calcium Hydroxide Hydrated Silicates and Calcium Sulfate Hydrated. A distilled water was used as kneading water.

Five groups of mortars with five specimens in each group were analyzed. All the tested specimens were packaged using the hydraulic lime and a binder-aggregate ratio of 1:3 by mass. The first group – noted 1 - was taken as reference and it was composed of mortars with 100% natural aggregate percentage. In the other four groups – noted 2,3,4,5 - the natural sand was gradually replaced with an increasing percentage by mass of recycled aggregate from 12,5% to 50%. The water – binder ratio of 2,3,4,5 was adjusted due to AAC aggregate water adsorption. Table 2 shows the compositions of the tested mortars.

Table 2. Compositions of tested mortars.

	HL (g)	SS (g)	AAC (g)	W (g)	W/B	RA (%)
1	450	1350	0	225	0,50	0
2	450	1181,25	168,75	337,5	0,75	12,5
3	450	1012,50	337,50	450	1,00	25
4	450	843,75	506,25	562,5	1,25	37,5
5	450	675	675	675	1,50	50

HL, hydraulic lime; SS, siliceous sand; AAC, Autoclaved Aerated Concrete recycled aggregates; W, kneading water; W/B, water/binder ratio; RA, AAC percentage by mass on the total aggregates.

2.2 Methods

2.2.1 Mixing procedure of mortars and testing program of physical, mechanical and resistance to carbonation properties

Physical, mechanical and resistance to carbonation tests were performed on prismatic specimens according to UNI EN 196-1:1996 specifications. The natural sand and the recycled

aggregates were dry premixed before they were blended with the hydraulic lime and the kneading water. The specimens were molded in prismatic casts (40x40x160 mm) and cured in a climatic chamber (MSL Humichamber EC 125) under controlled conditions according to UNI EN 1015-11:2007. Three specimens of each group were tested for density, porosity, water adsorption, compressive and flexural strength, two specimens of each group were tested for resistance to carbonation.

2.2.2 Apparent and bulk dry densities, open porosity and water adsorption

The tests were conducted according to UNI EN 1936:2007 specifications. The prismatic specimens were dried in an oven at 70±5° temperature until a constant mass was recorded.

As the mass was stabilized, the three specimens of each group were weighted and their dry mass M1 was recorded. Then the dry specimens were stored for 24h under vacuum in a vessel in which the pression was gradually lowered to 15±5 mmHg. After this period a volume of water was introduced in the vessel so that the specimens were immersed for at least 5 mm. The specimens were kept under vacuum and immersed in water for 24h with the same pression of 15±5 mmHg. Finally, the pression was returned to the atmospheric value and the specimens were left immersed for other 24h. After the 72h storage the immersed specimens were weighted and the M2 value was recorded. The mortars were then wiped with a cloth and the mass of the saturated specimens, noted M3, was measured.

The apparent (ρ_a) and the bulk (ρ_r) densities, the open porosity (p) and the water adsorption (W) were finally calculated using the UNI EN 1936:2007 equations.

2.3 Mechanical Properties

The compressive and the flexural resistance tests were performed according to UNI EN 1015-11:2007 procedure using the Alpha Technologies Tensometer 2020 machine. The compressive load cells were of three types: groups 3,4,5 were tested with 5kN, group 2 with 10kN and group 1 with 15kN. The flexural load cells were 5kN for groups 4,5 and 10kN for groups 1,2,3.

2.3.1 Adherence on substrates test

The adhesive strength of mortars on substrates was measured according to UNI EN 1015-12:2016 procedures. Three different substrates - brick, tuff and lapil-cement - were tested and their fracture patterns were compared.

2.3.2 Resistance to carbonation

The resistance to carbonation test and the analysis of the results were conducted according to UNI EN 13295:2005 indications. The carbonation depth was measured according to UNI EN 14630:2003 procedures. The measurement was repeated only two times - on 15th and on 30th day- because all the specimens were fully carbonated after thirty days.

3 Results

3.1 Apparent and Bulk Dry Densities, Open Porosity and Water Adsorption

The apparent and the bulk dry densities, the open porosity and the water adsorption of the tested

mortars are shown in Table 3. The mean values for the three specimens of each group are reported. The reference mortar -1- exhibited an apparent density 66% higher than the group 5.

The open porosity and the water adsorption of group 5 were respectively twice and three times as high as group 1.

Table 3. Apparent and bulk dry densities, open porosity and water adsorption. Mean values of the three specimens of each group are reported.

	ρ_a (g/cm^3)	ρ_r (g/cm^3)	*p* (%)	*W* (%)
1	1,75	2,24	22	12,58
2	1,51	2,13	29	19,35
3	1,27	1,95	35	27,12
4	1,20	1,91	37	31,07
5	1,05	1,87	44	41,53

ρ_a, apparent dry density; ρ_r, bulk dry density; p, open porosity; W, water adsorption

3.2 Mechanical Properties

The mean values of flexural and compressive strength are reported in Table 4. The flexural resistance of group 4 was tested only on two specimens due to the breakage of one sample during the curing period. The group 5 exhibited a flexural and a compressive resistance fifteen and ten times, respectively, as low as mortars of group 1.

Table 4. Flexural and compressive strength. Mean values of the three specimens of each group* are reported.

	σ_f (MPa)	σ_c (MPa)
1	2,62	6,93
2	1,54	4,53
3	0,67	1,49
4	0,13	0,90
5	0,17	0,57

* Except for flexural resistance of group 4 (mean values of two specimens); σ_f , flexural resistance; σ_c, compressive resistance.

The compressive strength values were compared to UNI EN 998-2:2016 and to UNI EN 998-1:2016 specifications with respect to the classes of masonry and rendering or plastering mortars, respectively. The classification of the tested mortars is reported in Table 5.

3.3 Adherence on Substrates Test

The adhesive strength of mortars on each of the tested substrates is shown in Table 6. Mean values of recorded resistance are reported along with UNI EN 1015-12:2016 fracture pattern classification. The A, B, C pattern types referred to an adhesion fracture at the interface between mortar and substrate, to a cohesion fracture in the mortar itself and to a cohesion fracture in the substrate material, respectively.

Table 5. Classification of the tested mortars according to UNI EN 998-1,2:2016.

	UNI EN 998-2	UNI EN 998-1	
	Table 1	Table 1	Table 2
1	M5	CS III/ IV	GP-LW-CR-OC
2	M2,5	CS II/ III	GP-LW-CR-OC-R-T
3	M1	CS I	GP-LW-CR-OC-T
4	/	CS I	GP-LW-CR-OC-T
5	/	CS I	GP-LW-CR-OC-T

/ not classified; GP general purpose; LW lightweight rendering/plastering; CR coloured rendering mortar; OC one coat rendering mortar for external use; R renovation mortar; T thermal insulation mortar

Table 6. Adhesive strength on substrates. Mean values of resistance and fracture pattern type are reported.

	Brick		Tuff		Lapil-cement	
	f_u (MPa)	FP	f_u (MPa)	FP	f_u(MPa)	FP
1	0,24	A	0,29	B/C	0,56	A
2	0,34	A	0,34	B/C	0,26	B
3	0,30	B	0,04	B/C	0,14	B
4	0,16	B	0,05	A	0,12	B
5	/	/	/	/	0,09	B

f_u, adhesive strength; FP, fracture pattern; / it was not possible to measure the strength

3.4 Resistance to Carbonation

The results of the resistance to carbonation test are shown in Figure 2. On the 15th day the group five was carbonated twice as high as the reference mortar whereas all the specimens were fully carbonated on the 30th day.

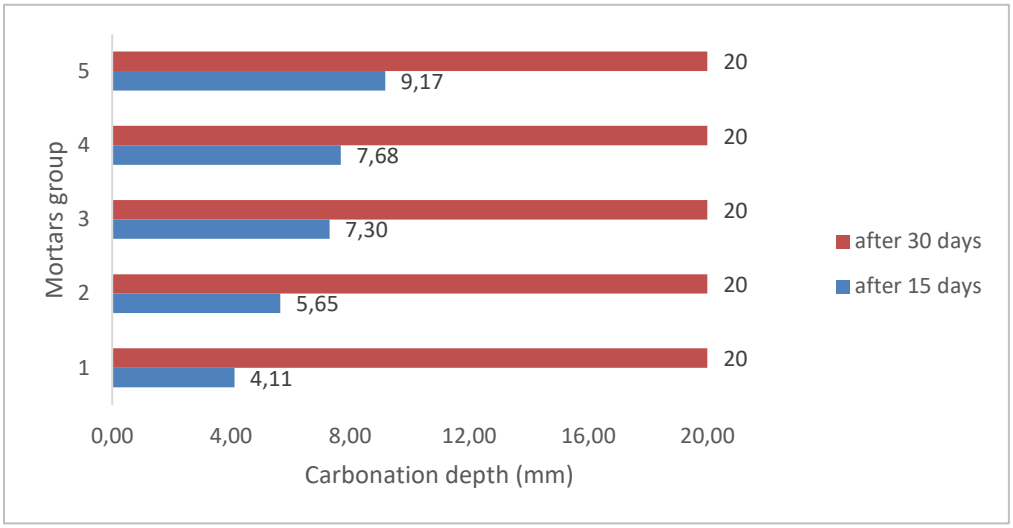

Figure 2. Resistance to carbonation test. Carbonation depth on 15th and 30th day are reported.

4 Discussions and Conclusions

The aim of the research was to investigate the influence of Autoclaved Aerated Concrete waste production aggregates on the mechanical and the durability properties of mortars, with specific respect to the resistance to carbonation. Results indicate that the replacement of the ordinary siliceous sand with AAC aggregate impacts on the hard-state properties of mortars.

The density and the mechanical properties – compressive and flexural strengths – and the adhesive strength to substrates decreased as the recycled aggregate percentage grew. Concerning the adhesive strength to substrate, the adherence to tuff rapidly lowered as the sand was replaced with AAC. Moreover, the open porosity and the water adsorption increased as AAC replaced the natural sand. Actually, the mortars with a higher percentage of AAC needed more kneading water due to the AAC adsorptive properties. Finally, the highest AAC mortar exhibited a short-term low resistance to carbonation, whereas the same value of carbonation depth was observed on 30^{th} day measurement for all the specimens.

Similar trends were reported by Blanco *et al.* (2000) who recorded a strong correlation between the use of lightweight aggregates and the physical and the mechanical properties of concretes. Moreover, the discussed results are consistent with Zhao *et al.* (2015) who measured the reduction of flexural and compressive strength of concretes due to the use of recycled aggregates. Tewar *et al.* (2017) also investigated the substitution of natural sand with AAC waste production aggregates and they reported the growing of kneading water mass and the lowering of compressive strength as AAC percentage was kept higher. Finally, the higher porosity of recycled-aggregates conglomerates was found responsible for a higher CO2 uptake, similar to Evangelista *et al.,*(2010); de Oliveira Andrade *et al.,*(2018).

However, the tested mortars were packaged with only one type of binder and one particle sizes distribution of aggregates, mainly ranged between 2 and 4 mm. Therefore, further studies are necessary to find if the type of binder and the packing of aggregates can modify the discussed results. The resistance to carbonation test needs to be repeated with a shorter time interval between the measures in order to better evaluate the evolution of the phenomenon. Finally, a mechanical test on the carbonated specimens has to be executed to investigate the effects of CO2 diffusion on the compressive and the flexural strength of the mortars.

In conclusions, the substitution of natural sand with AAC aggregates seems to be useful to package both masonry and rendering or plastering mortars. Moreover, the increased porosity and the reduced density of higher AAC percentage mortars suggest their potential thermal insulating properties. Conversely, a threshold for AAC percentage is necessary for masonry mortars packaged with hydraulic lime due to the reduction of mechanical performances and resistance to carbonation.

ORCID

Maurizio Nicolella: http://orcid.org/0000-0002-7140-6759
Claudio Scognamillo: https://orcid.org/0000-0002-0954-7323
Federica Vitale: https://orcid.org/0000-0003-4297-3372

References

Anastasiou, E., Papachristoforou, M., Anesiadis, D., Zafeiridis, K. and Tsardaka, E. C. (2018). Investigation of the use of recycled concrete aggregates originating from a single ready-mix concrete plant. *Applied Sciences (Switzerland)*, *8*(11). https://doi.org/10.3390/app8112149

Blanco, F., Garciéa, P., Mateos, P. and Ayala, J. (2000). Characteristics and properties of lightweight concrete manufactured with cenospheres. *Cement and Concrete Research*, *30*(11), 1715–1722. https://doi.org/10.1016/S0008-8846(00)00357-4

Coppola, B., Courard, L., Michel, F., Incarnato, L., Scarfato, P. and Di Maio, L. (2018). Hygro-thermal and durability properties of a lightweight mortar made with foamed plastic waste aggregates. *Construction and Building Materials*, *170*, 200–206. https://doi.org/10.1016/j.conbuildmat.2018.03.083

Ćosić, K., Korat, L., Ducman, V. and Netinger, I. (2015). Influence of aggregate type and size on properties of pervious concrete. *Construction and Building Materials*, *78*, 69–76. https://doi.org/10.1016/j.conbuildmat.2014.12.073

Dang, J. and Zhao, J. (2019). Influence of waste clay bricks as fine aggregate on the mechanical and microstructural properties of concrete. *Construction and Building Materials*, *228*, 116757. https://doi.org/10.1016/j.conbuildmat.2019.116757

de Oliveira Andrade, J. J., Possan, E., Squiavon, J. Z. and Ortolan, T. L. P. (2018). Evaluation of mechanical properties and carbonation of mortars produced with construction and demolition waste. *Construction and Building Materials*, *161*, 70–83. https://doi.org/10.1016/j.conbuildmat.2017.11.089

Evangelista, L. and de Brito, J. (2010). Durability performance of concrete made with fine recycled concrete aggregates. *Cement and Concrete Composites*, *32*(1), 9–14. https://doi.org/10.1016/j.cemconcomp.2009.09.005

M.I. Khan. (2002). Factors affecting the thermal properties of concrete and applicability of its prediction models. *Building and Environment*, *37*, 607–614.

Mendes, J. C., Barreto, R. R., de Paula, A. C. B., Elói, F. P. da F., Brigolini, G. J. and Peixoto, R. A. F. (2019). On the relationship between morphology and thermal conductivity of cement-based composites. *Cement and Concrete Composites*, *104*(October 2018), 103365. https://doi.org/10.1016/j.cemconcomp.2019.103365

Nepomuceno, M. C. S., Isidoro, R. A. S. and Catarino, J. P. G. (2018). Mechanical performance evaluation of concrete made with recycled ceramic coarse aggregates from industrial brick waste. *Construction and Building Materials*, *165*, 284–294. https://doi.org/10.1016/j.conbuildmat.2018.01.052

Tewar, B., Shah, P. M. and Patel, P. B. (2017). Effect of Partial Replacement of Sand with Wastage of Manufactured AAC Block in Concrete. *Materials Today: Proceedings*, *4*(9), 9817–9821. https://doi.org/10.1016/j.matpr.2017.06.273

Zhao, Z., Remond, S., Damidot, D. and Xu, W. (2015). Influence of fine recycled concrete aggregates on the properties of mortars. *Construction and Building Materials*, *81*, 179–186. https://doi.org/10.1016/j.conbuildmat.2015.02.037

UNI EN 13295:2005. Products and systems for the protection and repair of concrete structures. Test methods. Determination of resistance to carbonation

UNI EN 1015-11:2007. Determination of flexural and compressive strength of hardened mortars

UNI EN 1936:2007. Determination of real density and apparent density, and of total and open porosity

UNI EN 14630:2007. Products and systems for the protection and repair of concrete structures. Test methods. Determination of carbonation depth in hardened concrete by the phenolphthalein method

UNI EN 196-6:2010. Methods of testing cement − Part 6: Determination of fineness.

UNI EN 459-1:2010. Building lime - Part 1. Definitions, specifications and conformity criteria

UNI EN 933-1:2012. Tests for geometrical properties of aggregates – Part 1: Determination of particle size distribution – sieving method

UNI EN 1097-6:2013. Tests for mechanical and physical properties of aggregates − Part 6: Determination of particle density and water absorption

UNI EN 998-1:2016. Specification for mortar for masonry – Part 1: Rendering and plastering mortars

UNI EN 998-2:2016. Specification for mortar for masonry – Part 2: Masonry mortar

UNI EN 1015-12:2016. Methods of test for mortar of masonry - Part 12: Determination of adhesive strength of hardened rendering and plastering mortars on substrates.